



2026 Product Flip Book

 <p>GA INDUSTRIES A VAG-Group Brand</p> <p>Pages 4-5</p>	 <p>SOVAL</p> <p>Pages 6-9</p>	 <p>EVR Products A DEVAZIO COMPANY</p> <p>Pages 10-11</p>	 <p>Berzico</p> <p>Page 12</p>	 <p>CVI CHAMPION VALVES INC.</p> <p>Page 13</p>
 <p>ORBINOX VALVE SOLUTIONS IN MORE THAN 70 COUNTRIES</p> <p>Page 14</p>	 <p>VSI WATERWORKS USA</p> <p>Page 15</p>	 <p>DRESSER PIPELINE SOLUTIONS</p> <p>Pages 16-17</p>	 <p>DEKS EASY TO WORK WITH</p> <p>Pages 18-19</p>	 <p>Press-Seal CORPORATION</p> <p>Pages 20-21</p>
 <p>JAM Wrap Joint and Manhole Tape</p> <p>Page 21</p>	 <p>INTERNATIONAL VALVE MARKETING</p> <p>Pages 22-23</p>	 <p>3M</p> <p>Pages 24-25</p>	 <p>Copperhead INDUSTRIES</p> <p>Pages 26-27</p>	 <p>Kansas PRODUCTS Manufactured by Vanderlans & Sons, Inc.</p> <p>Pages 28-29</p>
 <p>TEMPO</p> <p>Pages 30-31</p>	 <p>U.S. SAWS</p> <p>Pages 32-33</p>	 <p>WHITLAM The Industry Standard for Over 100 Years</p> <p>Pages 34-37</p>	 <p>BWM COMPANY</p> <p>Page 38</p>	 <p>Specification Rubber Products, Inc.</p> <p>Page 39</p>
 <p>Harrington STORZ CONNECT</p> <p>Page 40</p>	 <p>MJ Gaskets & T Head Bolt Kits</p> <p>Page 40</p>	 <p>United Steel & Fasteners</p> <p>Page 40</p>	 <p>VYLON PIPE</p> <p>Page 41</p>	 <p>QUICK-TRENCH Pre-Sloped Drainage System</p> <p>Page 41</p>
 <p>CAMIS INDUSTRIES, INC.</p> <p>Page 42</p>	 <p>Wing Nut Pipe Plugs</p> <p>Page 42</p>	 <p>ETCO ETCO Specialty Products, Inc.</p> <p>Page 42</p>	 <p>TU-TURN</p> <p>Page 43</p>	 <p>GUARDSHACK</p> <p>Page 43</p>



GA INDUSTRIES



MJ Plug Valves

GA INDUSTRIES



Flanged Plug Valves

GA INDUSTRIES



Swing Check Valves
220, 230, 250 Series
L/W, L/S, Air Cushion

GA INDUSTRIES



Swing Check Valves
340 S/W, 350 Series
L/W, L/S, Air Cushion

GA INDUSTRIES



Sewage Air
Combination 942
Vacuum 935

GA INDUSTRIES



Air Release
Series 905, 910,
920, 930, 933, 945

SOVAL



Flanged Plug Valves 1030

SOVAL



16" MJ Butterfly 1040

SOVAL



Rubber Flapper Flanged 1020

SOVAL



Silent Check Valve Flanged 1037

SOVAL



Silent Check Valves Wafer 1036

SOVAL



Ball Check Flanged 1080

SOVAL



Swing Check 824 Flanged UL/FM

SOVAL



Swing Check 826 L/W or L/S AWWA

SOVAL



Gate Flanged Series 801 (HW / Nut) AWWA

SOVAL



Gate Flanged Series 802 (HW / Nut) UL/FM

SOVAL



Gate Flanged Series 816 OS&Y UL/FM

INTERNATIONAL VALVE MARKETING



Sewage SS Body Air Release

VSI WATERWORKS



Swing Check Outside Lever and Weight

VSI WATERWORKS



Plug Valves Flanged and MJ

Specification Rubber Products, Inc.



Toruseal Flange Gaskets

Specification Rubber Products, Inc.




Barracuda Restrained Joint Gasket

JAM Wrap
Joint and Manhole Tape



Concrete Joint Water Infiltration Wrap

Heat Shrink Manhole Wrap



Wrap, Primer, and Closure Patches

Press-Seal CORPORATION



Crete-STIK Preformed Butyl Joint Sealant

Press-Seal CORPORATION



PSX Direct Drive 6" to 44" Pipe

Press-Seal CORPORATION



PSX Multi-size 1 1/2" to 4" Pipe to Manhole

DRESSER PIPELINE SOLUTIONS



Line Stop Fitting IPSCO & Hydro-stop

DRESSER PIPELINE SOLUTIONS



Tapping Sleeve Flanged/MJ CS/SS

DRESSER PIPELINE SOLUTIONS



Ultra Sleeve for MJ bell, and live line repairs

Jim@JimJollySales.com
IA, WI East, IL90 North, NE
847.489.2123

Andy@JimJollySales.com
IN, IL 188 South, MO
815.701.6173

Carl@JimJollySales.com
MN, WI West, ND, SD
763.248.0149

Mark@JimJollySales.com
IL 188 North, WI, IA
630.330.7265

Dave@JimJollySales.com
Operations Manager
224.339.3372

Brian@JimJollySales.com
Inside Sales
847.669.7570

Savannah@JimJollySales.com
Territory Manager New England
630.940.3619

Click on *
For Product
Web Links

Lansas PRODUCTS
Manufactured by Vanderlans & Sons, Inc.



NEW Multi-sized Front and Back with Rupture Protection

Lansas PRODUCTS
Manufactured by Vanderlans & Sons, Inc.



Single Sized Blocking Plug

Lansas PRODUCTS
Manufactured by Vanderlans & Sons, Inc.



Single Size Flow Through Plugs

Lansas PRODUCTS
Manufactured by Vanderlans & Sons, Inc.



Multi Sized Front & Back Test Plugs

Lansas PRODUCTS
Manufactured by Vanderlans & Sons, Inc.



25' & 50' Triple Hose 20/30/40' Lifting Hose



Mechanical Plugs

TEMPO



Drainage Basins 2 and 4 Hole

TEMPO



Pop Up Emitters

TEMPO



Square, Atrium & Round Grates

TEMPO



Large Round 8", 10", 12", & 15"

TEMPO



Round Covers 12" & 15"

TEMPO




4" Channel Drain

BWM COMPANY



Casing Spacers

BWM COMPANY



End Seals

BWM COMPANY



PipeSeals (Link) PS-200 to PS-600 Carbon Steel & SS

U.S.SAWS



Diamond Blades Tiger Tooth

U.S.SAWS



All Purpose Dos Seggie

U.S.SAWS



Diamond Blades General Purpose



Rubber Saddles Tee Style 4" 6" 8"



Rubber Saddles Wye Style 4" & 6"

Pipe Plugs



Wing Nut 4" to 18"

ETCO
ETCO Specialty Products, Inc.



T-Cone Pipe Plugs

DEKS
EASY TO WORK WITH




Rubber Couplings Non Shear SR & RC

DEKS
EASY TO WORK WITH



Rubber Couplings

Copperhead INDUSTRIES



Copper Cladded Steel 10/12 GA

Copperhead INDUSTRIES



Connectors, Test Stations & Grounds

Tracer Wire



Solid Copper Tracer Wire 12 ga HDPE 45 mil, Call For Price & Availability

SOVAL



PVC Compression Couplings

CAMIS INDUSTRIES, INC.



Rubber Silent Check Valves: Compression, Clamp & True Union

TU-TURN



Brushes

Click on *
For Product
Web Links



What's in Your 6" Plug Valve?



GA Industries	Feature	Competition
Ductile Iron	Body	Cast Iron
Ductile Iron	Plug	Cast Iron
Top & bottom	Grit excluders	Top only
6 Mil Epoxy	Exterior paint	2 Mil Enamel
6 Mil Epoxy	Interior paint	None
316SS	Fasteners	Zinc coated
1997	Cv Flow	1180
5 -11/16"	Max Object	3 -3/8"
12"	Hand Wheel Dia	8"



Sample
Specification



Specify GA Plug valves to get more
valve for your money!

AWWA C504 Butterfly Valve

- Flange and MJ available
- Series 804
- DI body and disc
- Molded in body seat 6"-24"
- * Replaceable seat 24"-72"
- 316SS seat edge
- NSF 61 approved
- Class 150B and 250b
- MJ Traveling nut actuator & FL worm gear



StreamSeal AWWA C504 Flanged

- Bi-directional zero leakage seating up to full pressure
- Class 150B and 250B
- Over 60-year design history
- Series 805 sizes 30" to 72"
- DI body and disc
- Field replaceable seat on disc

Click on *
For Product
Web Links




Sample
Specification



Check Valves

Heavy duty Swing Check Valves

- Heavy duty construction for pump station operation
- Full flow when 25° open, low headloss, reduced pumping cost, and anti slam characteristics
- Replaceable rubber disc seat
- Lever & weight field convertible right hand to left hand side, and from horizontal to vertical installation
- Lever and Spring, L/W with Air Cushion, Oil Cushion, Single increasing, double increasing sizes
- **Meets BABA and AIS, typically in stock at JJS 3" to 12"**

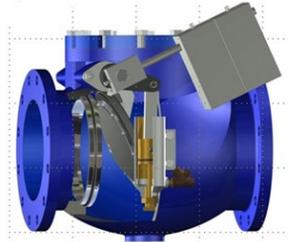

Specify GA 220 series for longevity and anti-slam performance!



Rubber Flapper Check

- Series 200 with Position indicator and back flow actuator

Slaminator

- Series SB 200 with spring assist with Position Indicator and Backflow Actuator

Silent Check

- Series 290 wafer 280 flanged



Air Release Valves

Used to maintain pumping efficiency and minimize the effects of trapped air in pressurized fluid systems. For water, sewage, pump station, and pipeline applications DI & SS construction

- Air Release Valves
- Air and Vacuum Valves
- Combination Air Valves
- DUOJET Combination Air Valves
- Sewage Air Release, Air and Vacuum, and Combination Air Valves
- Vacuum Breaking Valves for Water and Sewage
- Durovent All Stainless-Steel Air Valves



Click on *
For Product
Web Links



Automatic Control Valves

Patented design to allow for preventative maintenance and port flushing in just minutes

- 2" NPT Threaded rated to 400 PSI
- 2" to 12" Flanged rated to 250 PSI
- Visual position indicator
- Adjustable speed control
- Manufactured to AWWA C530 standard
- Full port ductile iron single chamber
- Painted (Interior and exterior) NSF® Fusion epoxy coated
- Typically, in stock

1050 Series Pressure Reducing Valve

1051 Series PRV with Low Flow Bypass

1052 Series Pressure Relief/Sustaining



1050 Series Retrofit Kit

- Custom built to retrofit any manufacture pressure control valve
- Streamline your maintenance routine with our preventative retrofit kit
- Cut down on maintenance time with this efficient retrofit solution
- Proprietary preventative maintenance design
- Manufactured to AWWA C530 Standard
- Available with braided or poly tubing



Click on *
For Product
Web Links



Gate Valves

- Series 801 FL 2" to 24", 300 PSI, AWWA C515
- Series 804 Ring Tite Push-on 2" to 12" AWWA C515
- Series 806 MJ x MJ 2" to 24" AWWA C515
- * • Series 809 MJ x FL 4" to 12" AWWA C515
- Series 810 Threaded 2" to 12" AWWA C515



Check Valves

- Series 826 Swing Check FL LW or LS 2" to 24" C508
- Series 827 Swing Check FL LW 2" to 16" C508
- Series 836 Wafer Check 2" to 8"
- Series 837 Double Door Check 2" to 12" UL
- Series 1020 Flex Check FL 2" to 14"
- Series 1036 Silent Check Wafer 2" to 14"
- Series 1037 Silent Check FL 2" to 12"
- Series 1080 Ball Check 2" to 14"



Butterfly Valves

- Series 840 Wafer DI Disc 2" to 12"
- Series 842 Lugged DI Disc 2" to 16"
- Series 845 Wafer SS Disc Lever 2" to 12"
- Series 846 Wafer SS Disc Gear HW 4" to 24"
- Series 1040 MJ 3" to 24" AWWA C504
- Series 1041 FL 3" to 24" AWWA C504
- Series 1043 FL Double Eccentric 30" to 72" C504
- Series 1043 MJ Double Eccentric 30" to 48" C504



Wye Strainers

- Series 852 Wye Strainer FL DI 2½" to 12" UL/NSF
- Series 853 Wye Strainer Grooved DI 2½" to 12" UL/NSF



Plug Valves

- Series 1030 Plug Valve FL 3" to 24"
- Series 1031 Plug Valve MJ 3" to 24"





Sample Specification

Fire Protection UL FM Approved

Adjustable Vertical Post Indicator

- Series 813 B / C / D depts in stock



Wall Indicator

- Series 812

Butterfly

- Series 848 Wafer 2" to 12" UL approved, 2" to 6" FM approved
- Series 849 Groove 2" to 12" UL approved, 2" to 6" FM approved



Swing Check – NSF 61

- Series 823 Groove 2½" to 12" UL/FM
- Series 824 FL 2" to 12" UL/FM
- Series 825 FL 2" 10 16" UL/FM



OS&Y Gate – NSF 61

- Series 816 FL x FL 2" to 12" & 14" to 24"
- Series 817 Groove x Groove 2½" to 12"
- Series 818 FL x Groove 2½" to 12" UL/FM



Gate NRS – NSF 61

- Series 802 FL x FL 2" to 12" UL/FM
- Series 802IP FL x FL 2" to 12" UL/FM
- Series 803 FL x MJ 3" to 12" UL/FM



*
*

- Series 807 FL x FL 3" to 14"
- Series 807IP FL x FL 3" to 14"

Switches and Detector

- Series 811 Water Flow detector
- Series 811-PS Pressure Switch
- Series 811-SS-IP Supervisory Switch / Indicator Posts
- Series 811-SS-OSY Supervisory Switch / OS&Y



Click on *
For Product
Web Links



Plumbing

Lead Free Brass

- Ball Valves full port threaded and C/C
- Boiler Drains press, MIP x MHT, FIP x MHT 90
- Swing Check Valves FIP x FIP, S x S
- Gate Valves 200 and 300 WOG FIP x FIP
- Hose bibs MPT x MHT and FIP x MHT
- Silcocks FCxC x MHT and FIP x MHT
- Vacuum Breaker & Wye Strainers FIP and FCxC

Leaded Brass

- Available in Ball Valves, Boiler Drains, Gate Valves, Gas Ball Valves, Hose Bibs and Check Valves



PVC Fittings NSF Sch 80

- Series 500 90° elbow SxS 1/2" to 8"
- Series 501 45° elbow SxS 1/2" to 10"
- Series 502 Couplings SxS 1/2" to 8"
- Series 503 Bushing spigot/socket 3/4"x1/2" to 6"x2"
- Series 504 Adaptor male by socket 1/2" to 4"
- Series 505 Adaptor female by socket 1/2" to 4"
- Series 506 Tee SxSxS 1/2" to 8" & reducing available
- Series 509 Cross SxSxSxS 1/2" to 4"
- Series 511 90° elbow socket/threaded 1/2" to 2"
- Series 512 Wye SxSxS 1/2" to 8"
- Series 525 Van Stone Flanges 8" to 12"



NSF PVC Valves

- Series 400 Sch 40 socket 1/2" to 6" SxS
- Series 401 Sch 40 threaded 1/2" to 4" TxT
- Series 410 Sch 40 compression coupling
- Series 562 CPVC-CTS ball 1/2" to 2"
- Series 564 True Union Vall Valve 1/2" to 4"
- Series 585 Butterfly Wafer 2" to 8"
- Series 587 Compact Ball Socket 1/2" to 6"

NON-NSF Butterfly Valves

- Series 405 Butterfly Wafer 2" to 10"



Click on *
For Product
Web Links

Elastomeric Duckbill Check Valves



- Cost competitive for large diameter
- Backflow Prevention
- Series CPO – outside pipe standard Neoprene construction with EPDM exterior standard



- Series CPF – flanged
- Series CPJ – flanged with metal casting
- Series CPI – flanged inside pipe
- Series CPI-IN – inside pipe



Reduce your costs and your delivery times



Expansion Joints *

Series SJ-21, SJ-221, MJ-61, ST-205

Available in single & multi-arch (filled or non-filled)

- Wide arch - mounting rings and optional control rods 316SS - (TE-51 is Teflon lined)
- Wide arch SJ-205 & MJ-61 for greater movement
- Cost competitive series MJ-60 to 90

Rubber Connectors

- Pump connectors series PC-35 spool, CC-15 concentric reducer, EC-25 eccentric reducer
- Rubber elbows series RE-55 90°, RE-65 90° long radius, RE-75 45° (1.5" to 16")
- Material handling hose series MHH-1000 1" to 24"
- Provides piping flexibility & vibration absorption, available in diameters from 1" to 24"



Click on *
For Product
Web Links

Pinch Valves

* Open Frame

- Series 1000/1100 - simple, proven, cost-effective design, virtually maintenance free, torques & flow rates remain constant

* Enclosed

- Series 2000 - perfectly suited for slurries, abrasives, and corrosive chemical applications

* Pneumatic & Electric Motorized

- Series 1200 & 2400 double acting, fail open or close

* Quarter Turn Pinch Valve


- Series 4400 - no "dead zones" design, full port, 1/2" to 3", polyester fiberglass body, double acting, fail open or close, pneumatic and electric motors

* Pneumatic Pinch – Series AJ

- Completely enclosed, air jacketed pinch valve, valve's split body is designed to allow quick and easy sleeve replacement

* Petite Pinch Valves - Series SE, AP, & QC


- Used to control viscous or abrasive material flow

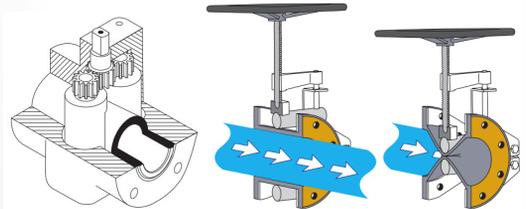

Pinch valves are a great solution for wastewater, industrial, food processing, pulp & paper, petrochemical and mining applications

Replacement Pinch Valve Sleeves

- Standard sleeve: double wall, funnel, and reduced port
- End styles: flanged, beveled, square, slip-on with collar, and slip-on smooth bore
- Fits other manufacture pinch valves for replacement

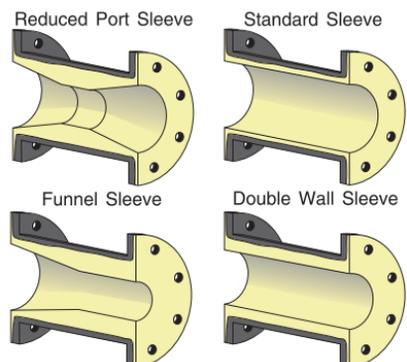

Click on *
For Product
Web Links

Berzico



Duckbill Flat Bottom Check Valves



- Slip On end of pipe
- Flanged
- 2" of water cracking pressure
- Neoprene (standard), EPDM, and other materials on request
- NSF-61 Certified elastomers
- 304 SS clamp standard 316 SS available
- 304 SS Flange ring standard 316 SS available
- 4" to 48" sizes



Duckbill Concentric Check Valves

- Slip On end of pipe
- Flanged
- Neoprene (standard), EPDM, and other materials on request
- NSF-61 Certified elastomers
- 304 SS clamp standard 316 SS available
- 304 SS Flange ring standard 316 SS available
- 4" to 48" sizes

Optional curved
bill for either
design

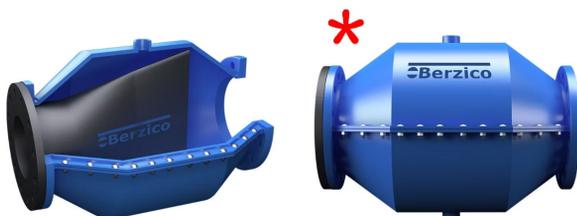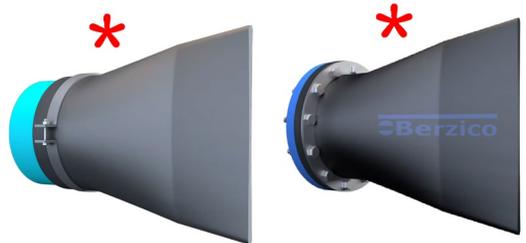

Inline Duckbill Check Valves

- Compact, low-maintenance design
- Fast-acting valve response
- Corrosion-resistant construction
- High pressure and temperature tolerance

Click on *
For Product
Web Links



Wafer Style Single Disc Check Valve



MODEL SDX
External Spring
Sizes: 2" - 36"
Class Rating(s): ASME
Class 150
Externally mounted
spring comes standard
to assist closure or lever
with weights, or
pneumatic dampers



MODEL SDR
Spring Loaded
Sizes: 2" - 12"
Class Rating(s): ASME
Class 125 / 150 / 300
Spring loaded, self-
operating valve is ideal
for pumps, compressors,
blowers, and various
flow control equipment



MODEL SDS
Short Pattern API 6D
Sizes: 2" - 24"
Class Rating(s): ASME
Class 150 - 600
Boasting a one-piece
body design, eliminates
leak paths, and is
extremely low-
maintenance

Wafer Dual Disc Check



* **Model CVL - Rubber Lined**
Sizes: 2" - 24"
Class Rating(s): Class 150
Features a fully lined elastomer
insert and ductile iron valve body



* **Model CVR**
Sizes: 1.5" - 72"
Class Rating(s): Class 125 -
2500
With a lightweight and versatile
design, ensures zero leaks and
boasts a low overall pressure loss

Axial Flow



* **Model NZW - Wafer**
Sizes: 2" - 12"
Class Rating(s): Class 150
- 2500
Minimizes pressure loss,
accommodates turbulence



* **Model SCT - Threaded**
Sizes: 1/4" - 2"
Class Rating(s): Class 300
- 1000
Silent check for gas to
liquid to steam

Click on *
For Product
Web Links



ORBINOX
VALVE SOLUTIONS IN MORE THAN 70 COUNTRIES



Knife Gates

Series 10 – Wafer Style

- Cast Iron or 304SS body
- Sizes: 2” to 48”
- 30 to 150 psi depending on size

Series 20 – Lugged Heavy Duty


- 316SS body and gate
- Sizes: 2” to 36”
- 100 to 150 psi depending on size

* Series 22 – Lugged Bi-Directional

- 304SS or 316SS body and gate
- Sizes: 2” to 36”
- 100 to 150 psi depending on size

Series 61 – Slurry Wafer Bi-Directional


- DI body and 304 SS gate
- Sizes: 2” to 36”
- 75 to 150 psi depending on size
- Bottom media ejection guard or drain option

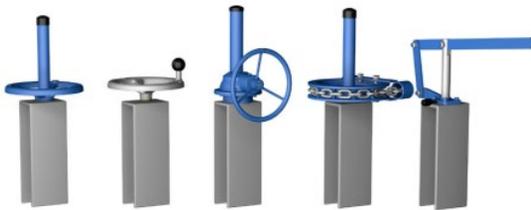

Options for manual operators

Penstocks

- Wall Mount - MU
- Channel - CC
- Weir - RB
- Stop Gate - AG
- Stainless Steel Stop Logs - SL
- Aluminum Stop Log - SA
- Round Flap Gate - RR
- Rectangular Flap Gate - RC

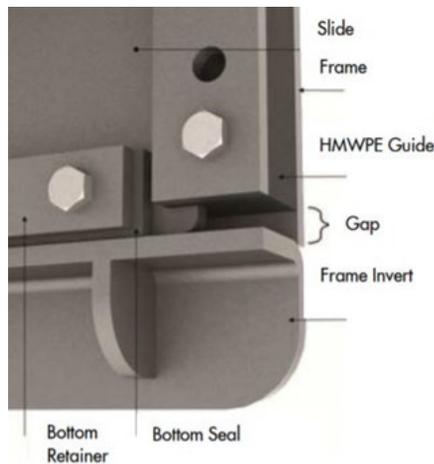

Self-cleaning guides




Click on *
For Product
Web Links



AWWA Plug Valves

- 3" to 12" with round port
- 14" to 72" with rectangular port
- Flanged and MJ
- DI body and plug
- 250 PSI rated
- Epoxy interior and exterior standard
- 316 SS fasteners standard
- High Cv flow area with plug away from the path of the flow

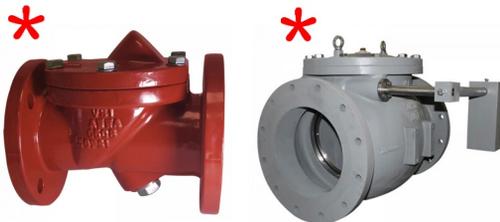

Rubber Flapper Check Valve

- 2" to 24" AWWA C508 UL certified
- 250 PSI rated
- Back flush and position indicator available

Swing Check Valve lever and Weight

- 2" to 48" AWWA C508
- 2" to 12" PSI 250 14" to 24" PSI 200

Butterfly Valves

Flanged & MJ AWWA C504 NSF-61 & UL rated

- 3" to 24" PSI 250
- Class 125 or 250 available

High Performance SS Body & Disc

- 2" to 12" Lugged CL 150
- Double offset rated to 285 PSI



Resilient Wedge Gate Valves

Flanged and MJ AWWA C509C515 UL Listed

- 2" to 24" PSI 250
- Threaded 1 1/2" to 6"
- OS&Y 2 to 24"

SS Ball Valves

- Threaded - NPT 1/4" to 2" – 1000 WOG
- Flanged 1" to 6" full port



Click on *
For Product
Web Links

DRESSER® PIPELINE SOLUTIONS

Lead Line Replacement Solutions

Abandoned Corporation Fitting

NSF 61 CERTIFIED

- Pressure rated domed cap to meet ASME VIII-1
- One sleeve fits AC, DIP, CIP, IPS, PVC, & more
- 3" and 4" wide outlets
- 304 SS bolts and nuts Fluoropolymer coated



* T3 Wide Range Service Saddle

- Use it on DIP, CIP, PVC, HDPE, AC Pipe material
- NSF-61 Full gasket for no metal-to-metal contact
- 304 Heavy duty Shell and branch 4" to 48"
- 304 SS bolts and nuts Fluoropolymer coated



Ultrasleeve Viedo *

Pipe Repair Solutions

* Pipe OD Chart



Ultra-Sleeve®

- Used on live services for encapsulating leaky bell joints, repair clamps, flanges, and couplings
- Faster repairs, safer with no pipe cutting, & lower costs
- Wide range for all pipe Sizes 2" to 36" pipe



One Bolt Coupling TX3® - MADE IN USA

- Wide range pipe OD's 2" to 24" NSF-61 & 275 psi rated
- Removable and replaceable Nitrile gasket for easy installation and resistant to hydrocarbons



Quick Cam® Wide Range Repair Clamp

- **MADE IN USA** - One hand closing handle
- Full body OD range = .9", 2" to 54" all SS or SS with DI lugs, removable lugs with handles, multi-O-ring seal bead, 200 psi, 180° F, 7½" to 36" widths (available with ½" to 2" outlets NPT or CC, HDPE with no spring washers)



Emergency Repair Kit 14" to 54"

- Multi-panel design, 24" wide, multi-O-ring seal bead, up to 225 psi (depending on size), 180° F

Click on *
For Product
Web Links

DRESSER® PIPELINE SOLUTIONS



Website



Pipe Tapping

Triple Tap® Tapping Sleeves

- Full body range = .9" Widest In Industry!
- Sizes 4" to 30" available in Flanged or MJ ends
- 250 psi working pressure, 180° F
- **MADE IN USA** - Superior branch welding
- Works on HDPE



Line Stop Fittings

Triple Tap® Line Stop

- Full body range = .9", sizes 4" to 24"
- Standard branch sizes of 4", 6", 8", 10", 12", & 16"
- Threaded or push style
- 250 psi, 180° F
- Full circumferential NBR rubber gasket



* Pipe Joining

1/2" through 120", -20 to +1200 °F, up to 1500 PSI

- * Couplings Style 38, 38 Stainless & 138
- * Couplings Style 39
- * Couplings Style 40 Long
- * Couplings Style 62 Reducing & Transition
- * Lock Couplings Style 167
- * Flange Adaptor Style 128
- * Dismantling Joint Style 131
- * Expansion Joint Style 63
- * Joint Harness Style 440
- * Line cap Style 39



Click on *
For Product
Web Links

Deep Inventory Levels!
Fast Same or Next Day Shipping!

Shielded Coupling Comparison



DEKS	Vs	Competition:
Elastomeric PVC	Body material	Elastomeric PVC
301 SS gear	SR clamps	301 SS gear
316 SS bolt	RC clamps	316 SS bolt
ANSI A 112.5.1 - ASTM C 1173	Standards	ASTM C 1173
ASTM D 5926 - CSA B602	Standards	ASTM D 5926 - CSA B602
.012" thick	SR Shield	.008" thick to not available
.015" thick	RC Shield	.012" thick
\$\$	SR price	\$\$\$
\$\$\$	RC Price	\$\$\$\$\$

New Large Diameter Products

Concrete to Concrete

- DX1004-1212
- DX1004-1515
- DX1004-1212SR
- DX1004-1515SR




PVC to PVC

- DX156-1515
- DX156-1818
- DX1056-1515SR
- DX1056-1818SR



Concrete to PVC

- DX1006-1212
- DX1006-1212SR
- DX1006-1515SR (Future)
- DX1006-1818SR (Future)

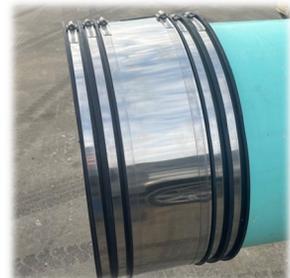

Click on *
For Product
Web Links



Website



Rubber Flexible Saddles

Softer rubber – easy to work with

- Tee size 4" & 6", Wye size 4" & 6", Tee size 8"

Joiners – Flexible couplings and shear (shielded) ring couplings – competitive pricing

- SR shield band is .012" and RC shield band is .015"
- Clay to Clay (01), Clay to CI/PVC (02), and Clay to AC/DI (03)
- Concrete to Concrete (04), Concrete to Clay (05), and Concrete to CI/PVC/CP/ST/Lead (06)
- AC/DI to CI/PVC/CP/ST/Lead (51)
- AC/DI to AC/DI (55)
- CI/PVC/CP/ST/Lead to CI/PVC/CP/ST/Lead (56)

Service weight soil gaskets - sizes 2" to 8"



Plumbing

Above ground non-shear couplings

Hose grip washer connector

Dish washer drain connector

Drain & trap connectors

Joining hub & spigot CI

Tee & elbow bushings

No hub couplings

Stainless steel clamps

Flexible quick trap

Flexible elbows

End caps



PLUMB-PRO®
Ratcheting Torque
Wrench 5/16"
nuts to 60 in lb



Press-Seal
CORPORATION



PSX Direct Drive Pipe to Manhole Boot

- Safely install from outside of the manhole
- All stainless-steel components with no welds or rivets
- Additional torque and multiple adjusters on larger diameters for best sealing
- Nitrile available 1.70" to 19.20" pipe

PSX Nylo Drive Manhole to Pipe Boot

- A power sleeve made from reinforced nylon polymer with SS threaded inserts embedded in the expansion mechanism expands with a certified installation wrench

Corrugated Pipe Adaptor

- Creates flat rubber sealing surface for corrugated pipe to manhole boot

T-Handle & Wrench with preset torque inputs

CRETE STIK

PREFORMED BUTYL JOINT SEALANT

- Cost effective
- Joint sealant that will not shrink, crack or dry out
- A variety of shapes and sizes to fit most applications
- Meets ASTM C 990 requirements for Compression Index per ASTM C 972
- Starter strip leads to less waste per roll
- Improved release liner



EZ-STIK #3

BUTYL SEALANT IN TROWELABLE FORM

- High-quality butyl rubber base
- Excellent gap and crack filling properties
- Resistance to acids and alkalis
- A permanent flexible solution



Click on *
For Product
Web Links



Press-Seal
CORPORATION

Multi-T Storm Water 4" & 6" lateral connections for HDPE


- Seals at inner liner of corrugated pipe
- Alignment node rests in valley of corrugation
- One size fits 12" to 60" pipe main
- Visual stops for fully homed pipe

Option 1 - Molded rubber sleeve, PVC hub, take up clamp, gasket for HDPE

Option 2 - Lateral connector rubber sleeve and take up clamp



Mult-T only
has one part
to fit 12" to
60" pipe

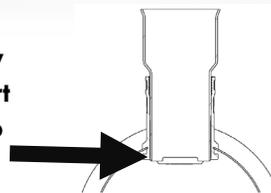

HDPE pipe
hub gasket

PVC
hub
Take up
clamp

Rubber
sleeve



JAM Wrap

Joint and Manhole Tape



Concrete Joint Wrap for I & I Prevention

Features

- Simple to apply, no primer, no heat, just peel & press!
- 50 mil elastomeric mastic with 15 mil woven polypropylene, pressure sensitive application, 4", 6", 8", & 12" width by 150' roll or cut to manhole size

Benefits

- Fast, easy installation, I & I prevention, no primer or heat needed, accommodates ground movement

Applications

- Manhole joint/chimney sealing, rectangular, round, or square vaults, pipeline corrosion protection, and step down joints



Best In-class Sewage Air Release Valves

AIS and BABAA compliant valves availability is in stock to 6 weeks!



* SZG

- Size 2" & up
- 31.5" Tall
- 0 to 150 PSI

Vacuum Relief

- SCFM 567
- 49 Lbs



* SWG

- Size 2" & up
- 33.5" Tall
- 3 to 150 PSI

Vacuum Relief

- SCFM 586
- 31 Lbs



* SXG

- Size 3" & up
- 22" Tall
- 1 to 150 PSI

Vacuum Relief

- SCFM 1509
- 59 Lbs



* SSG

- Size 2" only
- 26.25" Tall
- 1 to 150 PSI

Vacuum Relief

- SCFM 642
- 34 Lbs



* SDG

- Size 2" only
- 23.75" Tall
- 1 to 150 PSI

Vacuum Relief

- SCFM 600
- 44 Lbs



* SKW

- Size 2" only
- 18.16" Tall
- 1 to 150 PSI

Vacuum Relief

- SCFM 482
- 38 Lbs

Four Functions in one Valve: air release, vacuum protection, air release under constant pressure, and anti-surge/anti-shock

- Lower your total cost of ownership with **50 year expected life**
- **10-year warranty** decreases maintenance
- **Reduce maintenance** frequency in areas with high FOG
- High-capacity vacuum protection with smaller size valves **saves on cost**
- **Third party independent verified performance testing**



Best In-class Clean Water Valves

AIS and BABAA compliant valves availability is in stock to 6 weeks!



- **50 year expected life** & 10-year warranty
- Anti-surge feature to protect your pipe
- High capacity vacuum relief that reduces valve size
- Third party independent verified performance testing



Raw Water Valve (RAW)



- Size 2" & up
- 18" Tall
- 0 to 363 PSI
- **Save on cost** of sewage ARV with NEW RAW Water ARV!
- Four Function ARV
- Designed to handle leaves, silt, and organic material
- NSF-61 certified

Vacuum Relief

- SCFM 655
- 25 Lbs



WTR



- Size 2"
- 11.8" Tall
- 3 to 363 PSI

Vacuum Relief

- SCFM 676
- 20 Lbs



WTW



- Size 2" & up
- 12.25" Tall
- 3 to 363 PSI

Vacuum Relief

- SCFM 664
- 24 Lbs



WZW




- Size 2" & up
- 19.5" Tall
- 0 to 363 PSI

Vacuum Relief

- SCFM 652
- 26 Lbs

Optional Accessories

- Top vent threaded for piping out of structure
- Top flange
- Series C top screen vent
- Series B bias mechanism to aid performance near pump or check valve and mitigate water hammer
- Series A deep well air valve



Click on *
For Product
Web Links



Product
Video



Pipe Locating and Line Strike Prevention

EMS Warning Tape 7900 and EMS XT Tape

Features

- Proven 50-year RF technology for buried pipe locating
- RF tag every 8' in 500' roll
- Individual frequency for each utility
- EMS XT Tape Integrated 3,000 lb pull rope core material



Benefits

- Accurate locates with one-to-one communication – no bleed off
- Fast locates without having to leapfrog
- Simplified installation
- Line strike prevention with core rope material

Specify XT Tape for line strike prevention, fast and accurate locates



* **3M™ Dynatel™ Locator X Series**

1420X - Marker balls

7420X - Marker balls and XT Tape

2550X-ID/U12 - Marker balls, tracer wire, and CI/DI pipe. Bag included

7550X/U12 - Marker balls, XT Tape, tracer wire, and CI/DI pipe. Bag included

Any series can program RFID and include:

- Simplified user controls
- Receiver with Bluetooth® wireless technology
- Integrated USB port is compatible with USB Type-C® connector
- Internal GPS that can be saved internally or directly to a memory stick that is compatible with USB Type-C connector



1420



7420



2550/U12



7550/U12

Click on *
For Product
Web Links



EMS Electronic Marking System

- RF-proven **50-year technology**
- RFID markers- **facility data can be programed and stored in the marker**
 - pre-programmed unique serial number

Near surface marker

- 1-2' max bury depth
- 3" x .78" / 50 per box

Marker balls

- 5' max bury depth
- 4" diameter /30 per box
- Self leveling design

Full Range marker

- 8' max bury depth
- 15" diameter x .65" / 25 per box
- Doubles as digging shield



Operates in all soil types: under asphalt, cement, and wet or dry soil



XT Tape



Marker Balls

Utility Colors and Frequencies

Pathway Marking	Utility Colors and Frequencies	Point of Interest
34.9 kHz	RED Electric Power Lines, Cables, Conduit, and Lighting Cables	169.8 kHz
53.9 kHz	YELLOW Gas, Oil, Steam, Petroleum, or Gaseous Materials	83.0 kHz
48.8 kHz	ORANGE Communication Alarm or Signal Lines, Cables or Conduit	77.0 kHz
73.5 kHz	BLUE Potable Water	145.7 kHz
41.4 kHz	GREEN Sewers and Drain Lines	121.6 kHz
44.9 kHz	PURPLE Reclaimed Water, Irrigation, and Slurry Lines	66.35 kHz



Sample * Specification



Provides the strongest, most reliable, end-to-end signal for utility locating to safeguard what matters most.



1 Conduct

Copper-Clad Steel (CCS) has strength of steel with the conductivity and corrosion resistance of copper that is less likely to break

MEETS ASTM B1010 to protect against corrosion, breakage, defects, and imperfections that lead to unlocatable lines

Open Cut High Strength Tracer Wire

- 10-to-18-gauge wire, break load up to 684 lbs
- 30 mil HDPE jacket
- Superflex available

Directional Drill SoloShot Tracer Wire

- 8-to-12-gauge wire, break load strengths from 1150 to 2785 lb., 45 mil HDPE jacket
- Engineered for horizontal directional drilling and pipe bursting

Pipe Bursting SoloShot Xtreme Tracer Wire

- .2043" break load 4700 lb., 50 mil HDPE jacket
- SoloShot Burst – 3/16" SS 3700 lb. break load

Manufactured in USA



2 Connect

SnakeBite™

- Exclusive 90° twist lock design, no need to strip the wires, connectors are pre-filled with dielectric silicone sealant and **lock shut**


Mainline-to-Service Connectors

- No line cutting for lateral installation, filled with dielectric silicone

Twist connector with dielectric silicone

3 Ground

- 1.5 lb drive-in magnesium ground rod with HDPE cap and 20 feet of Copperhead® 12-AWG CCS wire

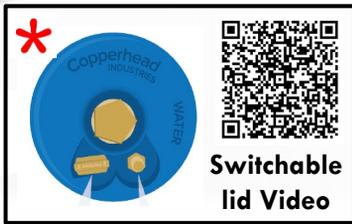

4 Access

SnakePit® Access Point

- Light Duty, Lite Duty Adjustable, Lite Duty XL Adjustable, Concrete/Driveway, Roadway
- Optional curb stop bracket available
- New exposed terminal lid with switchable ground

Cobra, Mini Cobra and SnakeSkin

BOABOX™ WATER

- The dual compartment and integrated entry points eliminate the need for two lids in a yard or right-of-way
- BOABOX 125 fits new or existing 1" and 1¼" curb box standpipes, and 150 on 1½" curb box standpipes

BOABOX™ SEWER

- Two access points in one
- Encapsulated magnet in pentagon for easy detection
- Industry first ¼ turn pentagon plug – No cross threading
- Fits SCH40 IPS and SDR35/26



5 Mark and Locate

Mamba™ Markers

- Flat Post two-sided fiberglass with recessed design to protect the vinyl decal
- Triad three-sided HDPE for high visibility
- Mamba Round to provide maximum visibility
- Mamba Round Locate Marker Post provides both visibility and access to test tracer wire systems, 6 terminals, and twist top or security sleeve

Vipermag™

- Featuring active frequencies of 512Hz, 8.19kHz, 83 kHz, passive frequency 60Hz, push button depth, and ferrous metal detection
- Standard equipment receiver, transmitter, direct connection cables, ground stake, soft sided case, alkaline batteries, user guide



Vipermag Video



Click on *
For Product
Web Links

LANSAS®
PRODUCTS
Manufactured by Vanderlans & Sons, Inc.



MADE IN USA

New 5 Line Multi Size Interchange Plugs

- Standard or custom cover with flanged or threaded connections

New 5 Line Joint Tester

- Single & double bladder
- High pressure testing and low pressure with lighter frame

New 5 Line Multi Sized Front & Back Plugs

- New flat rib design with improved reformulated rubber holds back 60% more back pressure
- Wide range sizes 8" to 16", 10" to 18", and 12" to 24"

New 5 Line Single Size Disc Plug

- 24" to 152" available with rupture protection
- All 5-Line molded front and back plugs are equipped with RP2 LANSAS Rupture Protection and comes with a 5 Year Pro-Rated Warranty**

Rupture Protected Back and Front Plugs

- Built-in air relief valve
- The valve will reset at or just below the required inflation pressure
- No more catastrophic failures
- Eliminates operator error
- No broken discs to be replaced
- Plug stays in service, maintains media containment

Multi-Size Domehead Plugs

- The first patent relates to the 2-ply of cross biased tire cord reinforcement, stronger and helps prevent large tears. Plugs are repairable under factory review
- The second patent covers our superior end design and steel spider end rings wrapped in fabric through the body



Click on *
For Product
Web Links



Additional Plugs

- SST & MST single and multi-size test plugs
- Mechanical plugs
- High pressure test plugs
- A.R. & SSB single-size blocking plugs
- Mechanical pipe plugs

Testing Equipment

- NEW SUPER-VAC™ POWERQUAD (4-Venturi) manhole vacuum generator
- Joint testers
- Manhole vacuum testing equipment
- Air testing kits and accessories

Accessories

- Dura-Lift hose with gage
- Protective sleeve
- Ez Plug pole and adaptors
- Gages

Nearly half of our products are tailored to individual client needs



Hurco

- Ripcord Ventilator – Stringer Kits
- Deflection gauges (aluminum or steel)
- Stringer kits, rope reels, parachutes
- Ripcord smoker and super ripcord smoker
- Hydrostatic test pumps (Old Faithful)
- Re-Rounder

Click on *
For Product
Web Links



TEMPO®

Channel Drain

- 4", 2½", and 1½" width available
- PVC profile extruded channel plus a snap-in overlapping grate
- Channel in 4' or 8' lengths
- Grates in 2' lengths grey, sand, black, or green color
- ADA compliant
- No glue required
- Easy installation with all junction connection possibilities
- Rated for Class B light trucks up to 20 MPH based on channel encased in concrete

Proven alternative to traditional concrete channel drain



Universal fitting kit



Square Catch Basins

9", 12", and 18" 2 or 4 Hole

- Two side panel openings plus an optional perforated opening at the bottom of the basin
- Risers available for 9", 12", and 18" basin

Square Grates: 9", 12", and 18"

- UV stabilized, green, black, sand, and grey
- Load rated for autos at speeds less than 20 mph

Pop-Up Relief Valves

- 4 Configurations available
- Cover rises ½" to discharge water with SS spring retraction



Click on *
For Product
Web Links

TEMPO®



Valve Boxes

Available in green, black, purple, and sand

- Round 6" and 10" Diameter
- Rectangular 14" x 19"
 - Rectangular low profile 14" x 19"
 - Rectangular extension 14" x 19"
- Rectangular Jumbo 17" x 24"
 - Rectangular low profile 17" x 24"
 - Rectangular extension 17" x 24"

Solvent Weld PVC Fittings *

Sizes 3" and 4" hub style

- Coupling
- 90° elbow short and long
- 45° and 22.5° elbow
- Tee, sanitary tee, and wye
- Reducer and cap



* Round Grates and Lids

Small Round Grates and Lids

- 3", 4", and 6" Round Grates
- Available in Black, Green, Sand and Grey

Large Round Grates

- 8", 10", 12", 15" and 18" Grates
- Available in Green and Black

Large Round Lids

- 12", 15" and 18" Lids
- Available in Green, Commonly used with Corrugated Pipe

Click on *
For Product
Web Links

U.S.SAWS™



Website

Battery Operated Valve Exerciser

For use with: Hydrants, Underground valves & Plant valves

- 400ft/lbs of adjustable torque for controlled exercising
- Digital turn counter shows valve open and closed position
- Makes a tough job easy
- Kit includes portable drill with turn counter, 3 batteries 5.2mA, hard case, and travel bag

**Exercise your valves to
promote longevity**



Blades – High quality – High Diamond Content

All U.S.SAWS' blades have a performance guarantee for the life of the blade!

- Pipe cutting blades – Tiger Tooth 4" to 20"
- General construction blades – The General 12" to 20"
- Multi-purpose blades – Dos Seggie 12" to 18"
- Asphalt blades - Major Asphalt 12" to 20"
- Concrete blades - Colonel Concrete 12" to 20"
- Professional large diameter walk behind blades 12" to 36"



Saws

- **Chainsaw** powered by air, hydraulic, or gas in 16" or 20"
- **Walk behind** powered by air or hydraulic size 20" blade
- **Handheld** powered by air or hydraulic sizes 14" to 24"
- **Belly powered** by air or hydraulic for pipe sizes 8" to 24", 24" to 48", and 48" to 72"



Click on *
For Product
Web Links

U.S.SAWS™

Tamping Rammer – PC3000

- Powerful Honda GX120 powered with diaphragm carburetor (3.5HP)
- 3080 lbf compaction force
- Heavy shock mount system to reduce hand/arm vibration and improve operator comfort
- Transport dolly included



Reversible Plate Compactor – PC7500

- Powerful Honda GX270 (8.5HP)
- 7850 lbf compaction force
- Fully hydraulic reversing mechanism provides more flexible maneuverability for forward, backward, and spot-on compaction

Safe Magnetic Lifting Tools

- Manhole lid lifters – **Break N Take** or **Robotron**
- **Heavy Duty** manhole lid lifters - 300 to 900 lbs
- Valve box lifter - **BoBop**



Video Tool Demonstrations

BoBop

Valve Box lid lifter
Hammer to loosen lid, use magnet for easy lift



RoboTron

Manhole lid lifter
Safely remove and replace manhole lids easily



Walk-Behind

Powerful pneumatic or hydraulic powered saw that is lightweight



Chain Saw

Pneumatic, gas and hydraulic powered for safe and easy pipe cutting



Belly Saw

Pneumatic or hydraulic powered for fast and safe pipe cutting with no fumes



Core Ez

Concrete coring system with fast set up to get the job done sooner



Click on *
For Product
Web Links



WHITLAM

The Industry Standard for Over 100 Years

Help Prevent Non-Revenue Water Loss for New Pipe Installations

* ODOR PROBLEM CAUSED BY OLEATE-BASED PIPE JOINT LUBRICANTS

Michel Fadel, Project Engineer
Gary A. Burlingame, Program Scientist

Bureau of Laboratory Services
Philadelphia Water Department
1500 E. Hunting Park Avenue
Philadelphia, PA 19124

Problem

- The Philadelphia Water Department first became aware of the odor problem in January 1990 when customers complained for two weeks after the construction of a new main
- In 51 new mains, 30 had the lubricant odor. About 34 percent of the new mains had to be failed. This resulted in extensive **flushings, sometimes for weeks**, before the odor dissipated.


Solution

An alternative must be non-toxic, water soluble, an excellent lubricant, useable under all weather conditions, not readily dried out and have no effects on water quality such as odor. Jameel Rahman (Philadelphia Water Department) has proposed a lubricant that consists of:
formula similar to BLUE LUBE



Polymer-Based Pipe Lubrication

- Easily flushes from the system
- Water soluble
- Anti-Bacterial formula
- Non-Re-active to chlorine solutions
- Safe on all metal, plastic, and rubber gasketed pipe
- Tasteless, odorless, and non-toxic

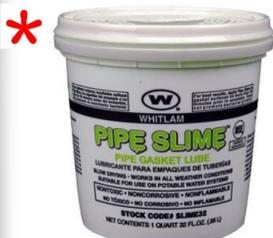

BLUE LUBE®

- 7° F to 150° F

PIPE SLIME™

- 0° F to 150° F



Click on *
For Product
Web Links

Tools

PLUMB-PRO® Plastic Pipe Beveler

- Bevel pipe in 10 seconds
- Saves time and money
- Reduces gasket damage
- C900 / C909 blue 4" 6" 8" 10" 12"
- SDR Sewer green 4" 6" 8" 10" 12"
- IPS / Sch 40 white 4" 6"

PLUMB-PRO® BoltTyte™ Through the Bolt Dual Socket Wrench

- Color Coded Grip for Easy Identification
- Open Socket Fits on Any Threaded Length
- Combines 2-Popular Socket Sizes in One Tool
- Rugged Construction of Handle and Ratchet



Tools - PLUMB-PRO®

- Telescopic valve wrench for 2" service nuts 3½' to 6' and 4½' to 8' telescoping
- 3-N-1 Folding service key adjustable valve wrench, curb stop meter key, 46" to 80" telescoping
- Super shovels, trench, drain, and square with cushion grip or D-handle
- Soil probes fiberglass T-handle 48" and 60"
- PVC ratcheting pipe cutters 1" to 2½"

Small Hand Tools

- 2-N-1 Torque wrench with retractable Lever for no-hub couplings
- 6 IN 1 Slotted Phillips™ screwdriver
- Nylon web ratchet type tie-down strap
- Pliers, hand saws, utility straps, hand level



Click on *
For Product
Web Links




WHITLAM
The Industry Standard for Over 100 Years

Paints and Coatings

TALON

**DIRECT TO METAL
INDUSTRIAL ENAMEL**

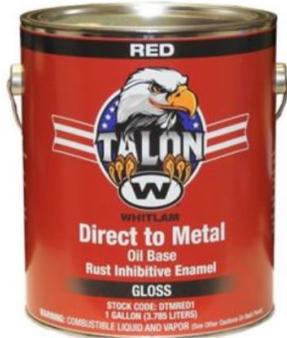

TALON™ DTM Direct to Metal Industrial Enamel

- Premium, industrial grade, alkyd enamel specially formulated for use on all types of metal surfaces
- Rust-inhibiting formula creates an armor coating against the elements
- Resists corrosion and has long lasting protection
- provides excellent gloss retention and resistance to chalking and fading

Safety Red	Safety Blue	Safety Green	Reclaim Purple	Safety Orange
Safety Yellow	Bright White	Gray	Red Oxide Primer	

Black Dragon Gilsonite Asphalt Paint

- Permanent waterproof & rustproof protection
- Applied with brush, roller or spray (after thinning)
- Fast dry and one coat
- Indefinite shelf life
- Fully bituminous coating
- Meets Federal Specification TTC-494 types I, II, and III



Black Seal Acrylic Concrete Sealer

- Quick drying formula – one coat coverage
- Concrete, masonry, & brick
- Interior and exterior use for damp-coating
- 5 gallon and 55 gallon drums
- Warm water and soap clean up

Aerosol Marking Paint and Machine

PRO-STRIPE APWA Inverted Marking Paint

PRO-STRIPE Athletic Turf Marking Paint

PRO-STRIPER Inverted Aerosol Marking Machine



Click on *
For Product
Web Links



WHITLAM

The Industry Standard for Over 100 Years

Instructional Video



FLOW-AIDE® BIODEGRADABLE SYSTEM DESCALER *

- Quickly dissolves water scale, lime, rust, and other water formed deposits
- designed to dissolve the toughest water scale, lime, and rust deposits
- Non-toxic, non-flammable, non-hazardous, non-corrosive and biodegradable
- High flow 800 GPH pump helps for faster descaling
- Designed to work with tankless water heaters that provide 3/4" hot and cold service connections
- Registered for use in beverage, pharmaceutical, bottling, poultry, and other food processing plants



Hand Cleaning Products

- Nontoxic and nonflammable. Safely removes ABS, PVC and CPVC plastic solvent cement from hands.
- Works great on removing dirt, adhesives, plumbing cement, urethane foam, pond dye, epoxy, silicone sealant, acrylic, spray paint, varnish, rubber cement and latex paint.

TALON Heavy Duty Hand Cleaning Towels

GLUE-WASH Pumice Hand Cleaner

TALON™ Citrus Hand Cleaner Walnut Shell Scrubbers

Lubricant Products

Quick Slip Plus vegetable oil-based pipe lube

- Great for all types of metal or plastic gasketed pipe

E-Z TURN Faucet and Valve Heat Proof Grease

- Waterproof & works without melting up to 350° F

Multi-Purpose Silicone grease

- Moisture resistant, non-curing lubricating paste



Click on *
For Product
Web Links



Pipe Seals

- Designed to provide a gas and watertight seal
- EPDM suitable for most applications in water (Nitrile available -40° F to 210° F)
- Glass reinforced plastic pressure plates with steel zinc dichromate or SS hardware
- JJS stock PS-200 to PS-600 in carbon steel and stainless steel

Wall and Floor Sleeves

- Wall collars attached with continuous MIG weld for watertight seal
- Wall collars normally 2" wide, special widths available
- Painted steel, FB epoxy, Galvanized, or SS materials of construction




Casing Spacers

- Accommodate mechanical joint pipe, push-on pipe, restrained pipe, welded joint pipe
- Shell 14-gauge 304SS mig welded 10-gauge risers
- Liner ribbed PVC extrusion .125" thick overlaps edges
- Runners 2" wide ultra high molecular polymer
- Fasteners are 5/16" SS bolts and hex nut

Vent Pipes

- Made in A-36 Steel, 304 SS or 316 SS
- Screens in carbon steel or SS
- Coatings of primer, galvanizing (cold or hot dip), coal tar epoxy, or custom
- Fabricated to your design

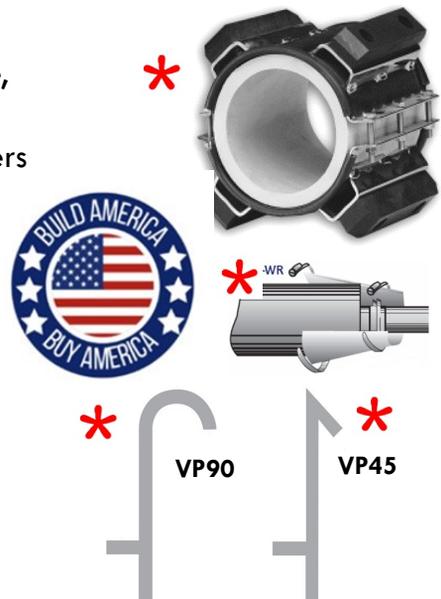

Click on *
For Product
Web Links



Molded Rubber Gaskets

Made in the USA – Domestic for federal projects

* TORUSEAL® RUBBER GASKETS

- Dual raised bulbs 2" to 64" 250-350 PSI
- Yellow dielectric SBR for bi-metallic connections

NSF-61 FLAT GASKETS

- EPDM Full face and ring 3" to 24"

* FILLER FLANGE GASKET

- 3" to 12" in stock, available 36"

* TYTON® RUBBER GASKETS

- NSF-61, SBR, EPDM, Nitrile, Neoprene, & FKM 3" to 48"

* METERSEAL™ EPDM RUBBER GASKETS

- Molded bulb 1½" and 2"

* MECHANICAL JOINT (MJ) GASKETS

- NSF-61, SBR, EPDM, Nitrile, and FKM 3" to 48"

* MECHANICAL JOINT TRANSITION GASKETS

- NSF-61, SBR, EPDM, Nitrile, and FKM 2" to 12"



Product
Video



Barracuda® Restrained Joint (RJ) Gasket



- Licensed TYTON® Gasket Manufacturer
- Molded in EPDM, SBR, Nitrile, and Viton FKM
- SAFETY ORANGE compound allows visual confirmation that a restrained joint gasket is installed
- Rated up to 350 PSI and fully warranted by Specification Rubber
- In stock for immediate shipment
- Gaskets available in 4" – 16"
- Manufactured in accordance with ANSI/AWWA C111/A21.11
- NSF Certified/ UL compliant
- **Made in the USA – Domestic for federal projects**

Click on *
For Product
Web Links



Harrington

STORZ CONNECT

NO HAZARDOUS LOCKS ! FAST QUARTER TURN CONNECTION TIME !

- Standardize your connections
- No adapters
- Connect LDH direct to hydrant
- Vandal resistant
- Maintenance free FDC

HPHA Cap - Uses the hydrants' existing brass with the adapter – only requires the removal of the hydrant's threaded cap

HIHS Cap - Requires removal of the brass from the hydrant - hydrant specific



HPHA™ only requires the removal of the threaded cap for installation



FREE reflective cables for new specified jobs!

MJ Gasket and T-Head Bolts

Gaskets

- SBR or Nitrile

T-Head Bolts

- 3/4" x 3 1/2"
- 3/4" x 4"
- 3/4" x 4 1/2"
- Cor-Ten or Cor-Blue
- 304 SS with epoxy coated nut

Bolt packs with MJ gasket kits or pails



T-Head Bolts

- For use with MJ valve installation
- Low and medium carbon steel specifications including, but not limited to, ASTM A-325 specifications
- 304 and 316 Stainless Steel
- AIS Domestic and Import available

Click on *
For Product
Web Links



Vylon Pipe for new sanitary sewer pipe

- Cost effective vs solid wall pipe without loss of performance
- Strong "I" beam closed profile design
- Chemically resistant to H₂SO₄ corrosion
- The superior 4-fin gasket assures leak proof joints
- PS 46 & 75 sizes 21" to 54" meeting 75 PSI
- Joints meet/exceed ASTM F477 standards



*Sewer Main Slip Lining

- Vylon slipliner pipe is designed for the repair and rehabilitation of existing sewers
- Low-cost alternative to dig and replace
- Allows the lining of a live sewer with a new pipe
- Eliminates the costs of bypass pumping systems




QUICK-TRENCH™

Pre-Sloped Drainage System

Trench Drain System

- MADE IN USA
- An innovative, new system designed to simplify linear drain installations under finished concrete, pavers, decking, or other hard surfaces
- Patented pre-sloped 6", 12", and shallow trench drainage systems or neutral
- Various grate choices and designs; pedestrian traffic, ADA compliant, Heavy Duty H25, Class C
- **NEW 6" 45 degree and Tee connectors**

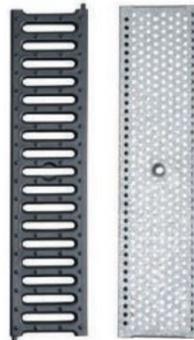

6" Drain



12" Drain



Shallow Drain





Silent Check Valve

MADE IN USA

- Eliminates hammering
- Nested flappers for long life
- Gasketless housing design
- Flapper has convex shape and angled seat design
- Stainless steel worm gear clamps
- Special texture on housing for improved hose grip
- Injection molded ABS housing provides high durability
- Can be mounted vertically or horizontally
- Fits copper, PVC, or IPS pipe
- All valves are pressure tested




Wing Nut Style Pipe Plug

Made in the U.S.A.

- No metal parts to corrode (Except 15" & 18")
- Rated for 5 PSI
- Seals bell and spigot ends of all plastic, iron or clay pipe
- Rugged nylon and rubber construction

Size	Expansion Range
4"	3 $\frac{3}{4}$ " to 4 $\frac{3}{4}$ "
5"	4 $\frac{3}{4}$ " to 5 $\frac{3}{4}$ "
6"	5 $\frac{3}{4}$ " to 6 $\frac{3}{4}$ "
8"	7 $\frac{7}{8}$ " to 8 $\frac{7}{8}$ "
10"	9 $\frac{3}{4}$ " to 11"
12"	11 $\frac{3}{4}$ " to 13"
15"	14 $\frac{3}{4}$ " to 15 $\frac{1}{4}$ "
18"	17 $\frac{3}{4}$ " to 18 $\frac{1}{4}$ "

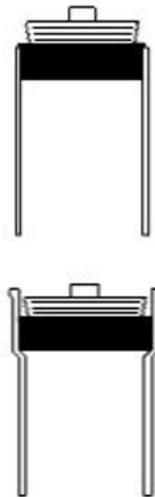

"T" Cone Expandable Pipe Plugs

- Available in sizes 1" through 8"
- Utility sewer pipe plugs
- Cleanout or test plug for building drains and DWV piping
- Cast iron, steel, clay, and plastic pipe
- Easy to install and remove
- Economical and reusable
- No metal parts to rust
- Designed for non-pressure sewers

Click on *
For Product
Web Links



Original Tu-Turn Brushes

It really only takes "tu" turns. Denser fill and tougher steel bristles. Bristles are tempered for longer life and scars deeper for stronger bond

- Machine brushes
- Economy brushes
- Plastic handle brushes
- Stainless steel brushes
- Stainless steel economy
- Dope, acid and chip brushes

GUARDSHACK™

Vandal and Theft Resistant Enclosures

MADE IN USA

- NEW Architectural Series in hammered copper, sterling silver and obsidian
- HGS Series
- Backflow Protector - lightweight and durable with recessed lock shield brackets for those tight spots
- Coast GuardShack - stainless steel enclosures
- Wall mount enclosures
- FrostGuard insulated blankets
- Irrigation enclosures





Pipe Outside Diameter Chart

Size	Copper	Steel IPS	Ductile	SDR 26/35	Clay	Concrete Estimated	AC100	AC150	AC200	N-12	Vylon (Any PS)	
											Pipe	Bell
¼	0.375	0.540										
½	0.625	0.840										
¾	0.875	1.050										
1	1.125	1.315										
1¼	1.375	1.660										
1½	1.625	1.900										
2	2.125	2.375										
2½	2.625	2.875										
3	3.125	3.500	3.96									
3½	3.625	4.000										
4	4.125	4.500	4.80	4.215	4.85-5.38	6.00	5.26	5.32	5.57	4.80		
5	5.125	5.563			6.31-6.65							
6	6.125	6.625	6.90	6.275	7.19-7.93	8.00	7.40	7.37	7.60	6.90		
8	8.125	8.625	9.05	8.40	9.25-10.09	10.25	9.57	9.62	9.79	9.10		
10		10.75	11.10	10.50	11.50-12.88	12.75	11.77	12.12	12.12	11.40		
12		12.75	13.20	12.50	13.75-15.30	16.00	14.04	14.38	14.38	14.50		
14		14.00	15.30				15.80	16.73	16.88			
15				15.30	17.19-18.70	19.50				18.00		
16		16.00	17.40				17.94	18.97	19.19			
18		18.00	19.50	18.70	20.65-22.40	23.00	20.44	21.20	22.54	22.00		
20		20.00	21.60				22.50	23.54	25.02			
21				22.05	24.13-26.43	26.50					22.29	24.79
24		24.00	25.80	24.80	27.50-29.84	30.00	27.17	28.22	29.98	28.00	25.24	27.95
27					31.00-32.13	35.00					28.46	31.39
30		30.00	32.00	32.00	34.38-35.63	38.50	33.80	35.42	37.48	36.00	31.69	34.84
36		36.00	38.30	38.30		45.50				42.00	38.13	41.72
42		42.00	44.50	44.50		52.50				48.00	44.58	48.62
48		48.00	50.80	50.80		59.50				54.00	51.02	55.50
54		54.00	57.56			66.50					57.47	62.08
60		60.00	61.61			73.50				67.00		
64			65.67									

**For more information, please visit our website
www.JimJollySales.com or call 847.669.7570**