




**Jim Jolly Sales, Inc.**  
Manufacturers' Representatives



# 2026 New England Product Flip Book

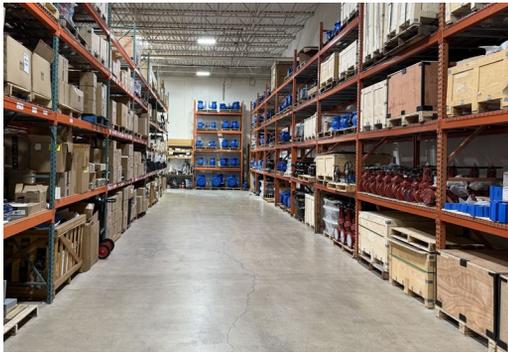

 **Specification  
Rubber  
Products, Inc.**  
**Page 3**



**INTERNATIONAL  
VALVE  
MARKETING**  
**Pages 4-5**



**Pages 6-7**



**Pages 8-9**



**Page 10**



**Page 11**



**Pages 12-13**



**Pages 14-15**



**Pages 16-17**



**Pages 18-19**



**Page 19**



**Page 20**



**Page 21**



**Page 22**



**Page 23**



**Page 24**



**Page 25**

**MJ Gaskets &  
T Head Bolt Kits**

**Page 25**



**Page 25**

**Wing Nut Pipe Plugs**



**Page 26**



**Page 27**



**Page 27**

**GA INDUSTRIES**



**MJ Plug Valves**

**GA INDUSTRIES**



**Flanged Plug Valves**

**GA INDUSTRIES**



**Swing Check Valves**  
220, 230, 250 Series  
L/W, L/S, Air Cushion

**GA INDUSTRIES**



**Swing Check Valves**  
340 S/W, 350 Series  
L/W, L/S, Air Cushion

**GA INDUSTRIES**



**Sewage Air**  
Combination 942  
Vacuum 935

**GA INDUSTRIES**



**Air Release**  
Series 905, 910,  
920, 930, 933, 945

**TEMPO**



**4" Channel Drain**

**TEMPO**



**Drainage Basins**  
2 and 4 Hole

**TEMPO**



**Pop Up Emitters**

**TEMPO**



**Square, Atrium &  
Round Grates**

**TEMPO**



**Large Round**  
8", 10", 12", & 15"

**TEMPO**



**Round Covers**  
12" & 15"

**VSI WATERWORKS**



**Swing Check Outside**  
Lever and Weight

**VSI WATERWORKS**



**Plug Valve**  
Flanged and MJ

**INTERNATIONAL VALVE MARKETING**



**Sewage SS Body**  
Air Release

**BWM COMPANY**



**PipeSeals (Link)**  
PS-200 to PS-600  
Carbon Steel & SS

**BWM COMPANY**



**Casing Spacers**  
and End Seals

**ETCO**  
ETCO Specialty Products, Inc.



**GaT-Cone Pipe**  
Plugs

**Specification Rubber Products, Inc.**



**Toruseal Flange**  
Gaskets

**Specification Rubber Products, Inc.**



**Barracuda Restrained**  
Joint Gaskets



**Rubber Saddles**  
Tee Style 4" 6" 8"



**Rubber Saddles Wye**  
Style 4" & 6"

**DEKS**  
EASY TO WORK WITH



**Rubber Couplings**  
Non Shear SR & RC

**DEKS**  
EASY TO WORK WITH



**Rubber Couplings**

**PS Press-Seal CORPORATION**



**Crete-STIK Preformed**  
Butyl Joint Sealant

**PS Press-Seal CORPORATION**



**PSX Direct Drive**  
6" to 44" Pipe

**PS Press-Seal CORPORATION**




**PSX Multi-size 1 1/2" to**  
4" Pipe to Manhole

**JAM Wrap**  
Joint and Manhole Tape



**Concrete Joint**  
Water Infiltration  
Wrap

**Heat Shrink Manhole Wrap**



**Wrap, Primer, and**  
Closure Patches

**TU-TURN**



**Brushes**



**Molded Rubber Gaskets**

**Made in the USA – Domestic for federal projects**

**\*TORUSEAL® RUBBER GASKETS**

- Dual raised bulbs 2” to 64” 250-350 PSI
- Yellow dielectric SBR for bi-metallic connections

**NSF-61 FLAT GASKETS**

- EPDM Full face and ring 3” to 24”

**\* FILLER FLANGE GASKET**

- 3” to 12” in stock, available 36”

**\*TYTON® RUBBER GASKETS**

- NSF-61, SBR, EPDM, Nitrile, Neoprene, & FKM 3” to 48”

**\*METERSEAL™ EPDM RUBBER GASKETS**

- Molded bulb 1½” and 2”

**\*MECHANICAL JOINT (MJ) GASKETS**

- NSF-61, SBR, EPDM, Nitrile, and FKM 3” to 48”

**\*MECHANICAL JOINT TRANSITION GASKETS**

- NSF-61, SBR, EPDM, Nitrile, and FKM 2” to 12”



**Barracuda® Restrained  
Joint (RJ) Gasket**



- Licensed TYTON® Gasket Manufacturer
- Molded in EPDM, SBR, Nitrile, and Viton FKM
- SAFETY ORANGE compound allows visual confirmation that a restrained joint gasket is installed
- Rated up to 350 PSI and fully warranted by Specification Rubber
- In stock for immediate shipment
- Gaskets available in 4” – 16”
- Manufactured in accordance with ANSI/AWWA C111/A21.11
- NSF Certified/ UL compliant
- **Made in the USA – Domestic for federal projects**



## Best In-class Sewage Air Release Valves

AIS and BABAA compliant valves availability is in stock to 6 weeks!



### \* SZG

- Size 2" & up
- 31.5" Tall
- 0 to 150 PSI

#### Vacuum Relief

- SCFM 567
- 49 Lbs



### \* SWG

- Size 2" & up
- 33.5" Tall
- 3 to 150 PSI

#### Vacuum Relief

- SCFM 586
- 31 Lbs



### \* SXG

- Size 3" & up
- 22" Tall
- 1 to 150 PSI

#### Vacuum Relief

- SCFM 1509
- 59 Lbs



### \* SSG

- Size 2" only
- 26.25" Tall
- 1 to 150 PSI

#### Vacuum Relief

- SCFM 642
- 34 Lbs



### \* SDG

- Size 2" only
- 23.75" Tall
- 1 to 150 PSI

#### Vacuum Relief

- SCFM 600
- 44 Lbs



### \* SKW

- Size 2" only
- 18.16" Tall
- 1 to 150 PSI

#### Vacuum Relief

- SCFM 482
- 38 Lbs

### Four Functions in one Valve: air release, vacuum protection, air release under constant pressure, and anti-surge/anti-shock

- Lower your total cost of ownership with **50 year expected life**
- **10-year warranty** decreases maintenance
- **Reduce maintenance** frequency in areas with high FOG
- High-capacity vacuum protection with smaller size valves **saves on cost**
- **Third party independent verified performance testing**



# Best In-class Clean Water Valves

**AIS and BABAA compliant valves availability is in stock to 6 weeks!**



- **50 year expected life** & 10-year warranty
- Anti-surge feature to protect your pipe
- High capacity vacuum relief that reduces valve size
- Third party independent verified performance testing



## \* Raw Water Valve (RAW)

- Size 2" & up
- 18" Tall
- 0 to 363 PSI
- **Save on cost** of sewage ARV with NEW RAW Water ARV!
- Four Function ARV
- Designed to handle leaves, silt, and organic material
- NSF-61 certified

### Vacuum Relief

- SCFM 655
- 25 Lbs



## \* WTR

- Size 2"
- 11.8" Tall
- 3 to 363 PSI

### Vacuum Relief

- SCFM 676
- 20 Lbs



## \* WTW

- Size 2" & up
- 12.25" Tall
- 3 to 363 PSI

### Vacuum Relief

- SCFM 664
- 24 Lbs



## \* WZW


- Size 2" & up
- 19.5" Tall
- 0 to 363 PSI

### Vacuum Relief

- SCFM 652
- 26 Lbs

## Optional Accessories

- Top vent threaded for piping out of structure
- Top flange
- Series C top screen vent
- Series B bias mechanism to aid performance near pump or check valve and mitigate water hammer
- Series A deep well air valve




Click on \*  
For Product  
Web Links



## AWWA Plug Valves

- 3" to 12" with round port
- 14" to 72" with rectangular port
- Flanged and MJ
- DI body and plug
- 250 PSI rated
- Epoxy interior and exterior standard
- 316 SS fasteners standard
- High Cv flow area with plug away from the path of the flow


Competitor  
narrow flow

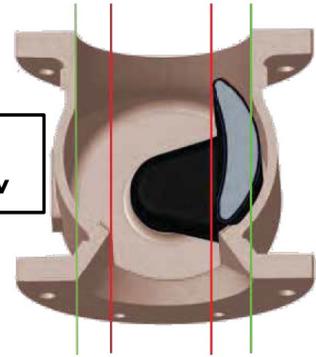

\*



VSI plug clears  
opening from  
intake to  
discharge



\*



## Rubber Flapper Check Valve

- 2" to 30" AWWA C508
- Flanged DI Body
- 250 PSI rated 2" to 24" 150 PSI rated 30"
- Back flush and position indicator available
- UL certified / NSF 61

\*



## Swing Check Valve

- 2" to 48" AWWA C508
- 2" to 12" PSI 250 14" to 24" PSI 200

\*



### **Bonded Seat**

- Lever and weight and lever and spring option

### **Replaceable Seat**

- Lever and weight or lever and weight with air cushion




## **Butterfly Valves**

### **Flanged & MJ AWWA C504**

- 3" to 24" PSI 250
- Seat molded in body
- Streamline disc
- NSF-61 and UL rated
- Class 125 or 250 available
- 30" to 42" PSI 150
- Seat mechanically fastened in body
- Flow through disc
- Class 125 or 250 available

### **High Performance SS Body & Disc**

- 2" to 12" Lugged CL 150
- Double offset rated to 285 PSI
- Standard and high temp seat available

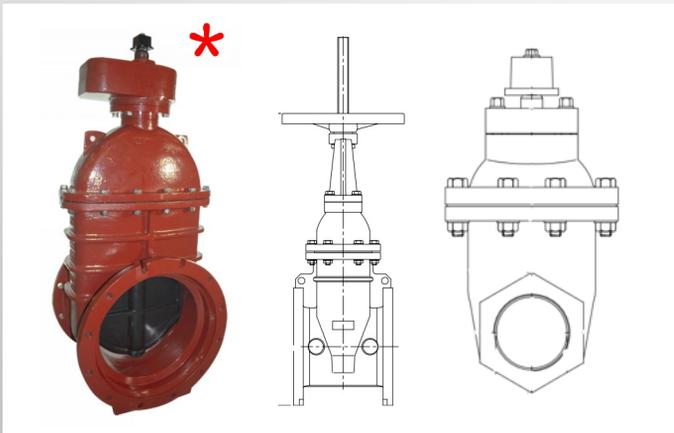


## **Resilient Wedge Gate**

- AWWA C509 and C515
- 2" to 24" PSI 250
- Flanged and MJ
- NSF-61 and UL listed
- Bevel gear and spur gear available

## **OS&Y Wedge Gate**

- Sizes 2" to 24"

## **Threaded Gate 1½" to 6"**

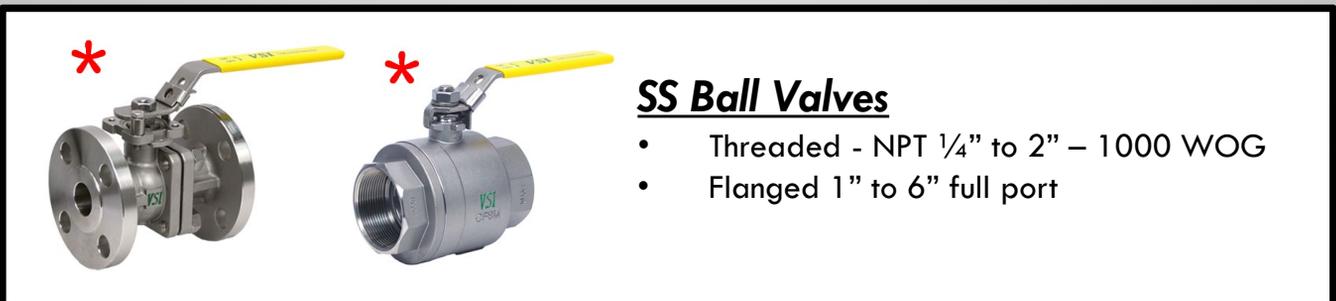

## **SS Ball Valves**

- Threaded - NPT ¼" to 2" – 1000 WOG
- Flanged 1" to 6" full port

Click on \*  
For Product  
Web Links

## Elastomeric Duckbill Check Valves



- **Cost competitive for large diameter**
- Backflow Prevention
- Series CPO – outside pipe standard Neoprene construction with EPDM exterior standard
- Series CPF – flanged
- Series CPJ – flanged with metal casting
- Series CPI – flanged inside pipe
- Series CPI-IN – inside pipe



**Reduce your costs and your delivery times**



## Expansion Joints \*

- Series SJ-21, SJ-221, MJ-61, ST-205  
Available in single & multi-arch (filled or non-filled)
- Wide arch - mounting rings and optional control rods 316SS - (TE-51 is Teflon lined)
  - Wide arch SJ-205 & MJ-61 for greater movement
  - Cost competitive series MJ-60 to 90

## Rubber Connectors

- Pump connectors series PC-35 spool, CC-15 concentric reducer, EC-25 eccentric reducer
- Rubber elbows series RE-55 90°, RE-65 90° long radius, RE-75 45° (1½" to 16")
- Material handling hose series MHH-1000 1" to 24"
- Provides piping flexibility & vibration absorption, available in diameters from 1" to 24"



## Pinch Valves

### \* Open Frame

- Series 1000/1100 - simple, proven, cost-effective design, virtually maintenance free, torques & flow rates remain constant




### \* Enclosed

- Series 2000 - perfectly suited for slurries, abrasives, and corrosive chemical applications

### \* Pneumatic & Electric Motorized

- Series 1200 & 2400 double acting, fail open or close

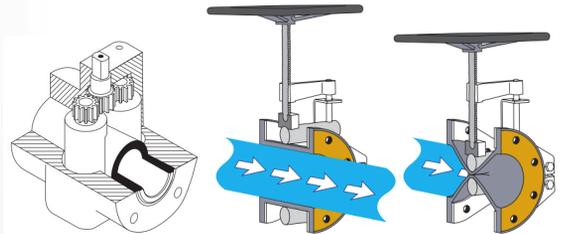

### \* Quarter Turn Pinch Valve

- Series 4400 - no "dead zones" design, full port, 1/2" to 3", polyester fiberglass body, double acting, fail open or close, pneumatic and electric motors

### \* Pneumatic Pinch – Series AJ

- Completely enclosed, air jacketed pinch valve, valve's split body is designed to allow quick and easy sleeve replacement




### \* Petite Pinch Valves - Series SE, AP, & QC

- Used to control viscous or abrasive material flow

***Pinch valves are a great solution for wastewater, industrial, food processing, pulp & paper, petrochemical and mining applications***

## Replacement Pinch Valve Sleeves

- Standard sleeve: double wall, funnel, and reduced port
- End styles: flanged, beveled, square, slip-on with collar, and slip-on smooth bore
- Fits other manufacture pinch valves for replacement

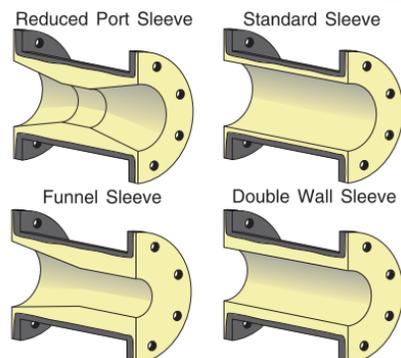

Click on \*  
For Product  
Web Links

# Berzico

## Duckbill Flat Bottom Check Valves


- Slip On end of pipe
- Flanged
- 2" of water cracking pressure
- Neoprene (Standard), EPDM, and other materials on request
- NSF-61 Certified elastomers
- 304 SS clamp standard 316 SS available
- 304 SS Flange ring standard 316 SS available
- 4" to 48" sizes



## Duckbill Concentric Check Valves


- Slip On end of pipe
- Flanged
- Neoprene (Standard), EPDM, and other materials on request
- NSF-61 Certified elastomers
- 304 SS clamp standard 316 SS available
- 304 SS Flange ring standard 316 SS available
- 4" to 48" sizes

Optional curved  
bill for either  
design

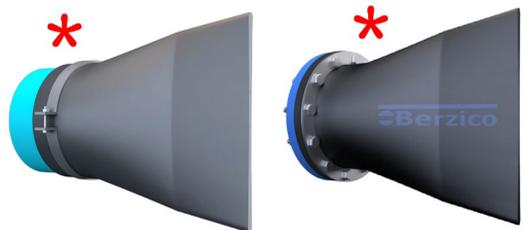

## Inline Duckbill Check Valves

- Compact, low-maintenance design
- Fast-acting valve response
- Corrosion-resistant construction
- High pressure and temperature tolerance

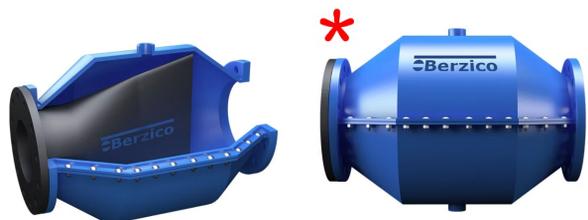



## Wafer Style Single Disc Check Valve



**MODEL SDX**  
**External Spring**  
**Sizes:** 2" - 36"  
**Class Rating(s):** ASME Class 150  
 Externally mounted spring comes standard to assist closure or lever with weights, or pneumatic dampers.



**MODEL SDR**  
**Spring Loaded**  
**Sizes:** 2" - 12"  
**Class Rating(s):** ASME Class 125 / 150 / 300  
 Spring loaded, self-operating valve is ideal for pumps, compressors, blowers, and various flow control equipment.



**MODEL SDS**  
**Short Pattern API 6D**  
**Sizes:** 2" - 24"  
**Class Rating(s):** ASME Class 150 - 600  
 Boasting a one-piece body design, eliminates leak paths, and is extremely low-maintenance.

## Wafer Dual Disc Check



**Model CVL - Rubber Lined**  
**Sizes:** 2" - 24"  
**Class Rating(s):** Class 150  
 Features a fully lined elastomer insert and ductile iron valve body.



**Model CVR**  
**Sizes:** 1½" - 72"  
**Class Rating(s):** Class 125 - 2500  
 With a lightweight and versatile design, ensures zero leaks and boasts a low overall pressure loss

## Axial Flow



**Model NZW - Wafer**  
**Sizes:** 2" - 12"  
**Class Rating(s):** Class 150 - 2500  
 Minimizes pressure loss, accommodates turbulence



**Model SCT - Threaded**  
**Sizes:** ¼" - 2"  
**Class Rating(s):** Class 300 - 1000  
 Silent check for gas to liquid to steam.



**Deep Inventory Levels!**  
**Fast Same or Next Day Shipping!**

**Shielded Coupling Comparison**



DEKS	Vs	Competition:
Elastomeric PVC	<b>Body material</b>	Elastomeric PVC
301 SS gear	<b>SR clamps</b>	301 SS gear
316 SS bolt	<b>RC clamps</b>	316 SS bolt
ANSI A 112.5.1 - ASTM C 1173	<b>Standards</b>	ASTM C 1173
ASTM D 5926 - CSA B602	<b>Standards</b>	ASTM D 5926 - CSA B602
<b>.012" thick</b>	<b>SR Shield</b>	<b>.008" thick to not available</b>
<b>.015" thick</b>	<b>RC Shield</b>	<b>.012" thick</b>
<b>\$\$</b>	<b>SR price</b>	<b>\$\$\$</b>
<b>\$\$\$</b>	<b>RC Price</b>	<b>\$\$\$\$\$</b>

**New Large Diameter Products**

**Concrete to Concrete**

- DX1004-1212
- DX1004-1515
- DX1004-1212SR
- DX1004-1515SR



**PVC to PVC**

- DX156-1515
- DX156-1818
- DX1056-1515SR
- DX1056-1818SR



**Concrete to PVC**

- DX1006-1212
- DX1006-1212SR
- DX1006-1515SR (Future)
- DX1006-1818SR (Future)





## Rubber Flexible Saddles

**Softer rubber – easy to work with**

- Tee size 4" & 6", Wye size 4" & 6", Tee size 8"

**Joiners** – Flexible couplings and shear (shielded) ring couplings – competitive pricing

- SR shield band is .012" and RC shield band is .015"
- Clay to Clay (01), Clay to CI/PVC (02), and Clay to AC/DI (03)
- Concrete to Concrete (04), Concrete to Clay (05), and Concrete to CI/PVC/CP/ST/Lead (06)
- AC/DI to CI/PVC/CP/ST/Lead (51)
- AC/DI to AC/DI (55)
- CI/PVC/CP/ST/Lead to CI/PVC/CP/ST/Lead (56)

**Service weight soil gaskets - sizes 2" to 8"**



## Plumbing

- Above ground non-shear couplings
- Hose grip washer connector
- Dish washer drain connector
- Drain & trap connectors
- Joining hub & spigot CI
- Tee & elbow bushings
- No hub couplings
- Stainless steel clamps
- Flexible quick trap
- Flexible elbows
- End caps



## Pipe Locating and Line Strike Prevention

### EMS Warning Tape 7900 and EMS XT Tape

#### Features

- Proven 50-year RF technology for buried pipe locating
- RF tag every 8' in 500' roll
- Individual frequency for each utility
- EMS XT Tape Integrated 3,000 lbs pull rope core material

#### Benefits

- Accurate locates with one-to-one communication – no bleed off
- Fast locates without having to leapfrog
- Simplified installation
- Line strike prevention with core rope material



**Specify XT Tape for line strike prevention, fast and accurate locates**



### \* 3M™ Dynatel™ Locator X Series

1420X - Marker Balls

7420X - Marker balls and XT Tape

2550X-ID/U12 - Marker balls, tracer wire, and CI/DI pipe. Bag included

7550X/U12 - Marker balls, XT Tape, tracer wire, and CI/DI pipe. Bag included

**Any series can program RFID and include:**

- Simplified user controls
- Receiver with Bluetooth® wireless technology
- Integrated USB port is compatible with USB Type-C® Connector
- Internal GPS that can be saved internally or directly to a memory stick that is compatible with USB Type-C connector



1420



7420



2550/U12



7550/U12



*Operates in all soil types: under asphalt, cement, and wet or dry soil*

**EMS Electronic Marking System**

- RF-proven **50-year technology**
- RFID markers- **facility data can be programmed and stored in the marker**
  - pre-programmed unique serial number

**Near surface marker**

- 1-2' max bury depth
- 3" x .78" / 50 per box

**Marker balls**

- 5' max bury depth
- 4" diameter /30 per box
- Self leveling design

**Full Range marker**

- 8' max bury depth
- 15" diameter x .65" / 25 per box
- Doubles as digging shield



**XT Tape**



**Marker Balls**

**Utility Colors and Frequencies**

Pathway Marking	Utility Colors and Frequencies	Point of Interest
34.9 kHz	<b>RED</b> Electric Power Lines, Cables, Conduit, and Lighting Cables	169.8 kHz
53.9 kHz	<b>YELLOW</b> Gas, Oil, Steam, Petroleum, or Gaseous Materials	83.0 kHz
48.8 kHz	<b>ORANGE</b> Communication Alarm or Signal Lines, Cables or Conduit	77.0 kHz
73.5 kHz	<b>BLUE</b> Potable Water	145.7 kHz
41.4 kHz	<b>GREEN</b> Sewers and Drain Lines	121.6 kHz
44.9 kHz	<b>PURPLE</b> Reclaimed Water, Irrigation, and Slurry Lines	66.35 kHz



# TEMPO®

## Channel Drain

- 4", 2½", and 1½" width available
- PVC profile extruded channel plus a snap-in overlapping grate
- Channel in 4' or 8' lengths
- Grates in 2' lengths grey, sand, black, or green color
- ADA compliant
- No glue required
- Easy installation with all junction connection possibilities
- Rated for Class B light trucks up to 20 MPH based on channel encased in concrete

**Proven alternative to traditional concrete channel drain**



## Universal fitting kit



## Square Catch Basins

**9", 12", and 18" 2 or 4 Hole**


- Two side panel openings plus an optional perforated opening at the bottom of the basin
- Risers available for 9", 12", and 18" basin

**Square Grates: 9", 12", and 18"**

- UV stabilized, green, black, sand, and grey
- Load rated for autos at speeds less than 20 MPH

## Pop-Up Relief Valves

- 4 Configurations available
- Cover rises ½" to discharge water with SS spring retraction

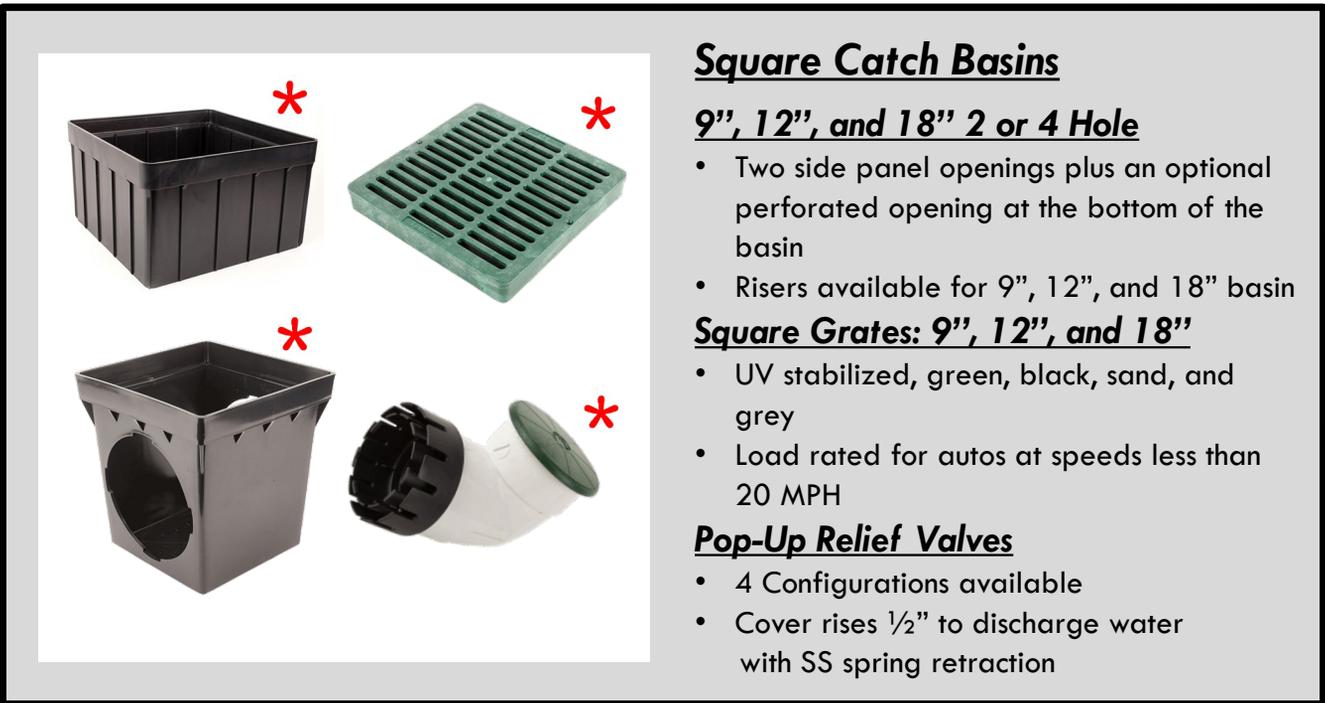

Click on \*  
For Product  
Web Links



## Valve Boxes

Lid colors available in green, black, purple, and sand

**Round 6" and 10" diameter**

**Rectangular 14" x 19"**

- Rectangular low profile 14" x 19"
- Rectangular extension 14" x 19"

**Rectangular Jumbo 17" x 24"**

- Rectangular low profile 17" x 24"
- Rectangular extension 17" x 24"

## Solvent Weld PVC Fittings \*

Sizes 3" and 4" hub style

- Coupling
- 90° elbow short and long
- 45° and 22.5° elbow
- Tee, sanitary tee, and wye
- Reducer and cap



## \* Round Grates and Lids

**Small Round Grates and Lids**

- 3", 4", and 6" round grates
- Available in black, green, sand and grey

**Large Round Grates**

- 8", 10", 12", 15" and 18" grates
- Available in green and black

**Large Round Lids**

- 12", 15" and 18" Lids
- Available in green, commonly used with corrugated pipe



**Press-Seal**  
CORPORATION



**PSX Direct Drive Pipe to Manhole Boot**

- Safely install from outside of the manhole
- All stainless-steel components with no welds or rivets
- Additional torque and multiple adjusters on larger diameters for best sealing
- Nitrile available 1.70" to 19.20" pipe

**PSX Nylo Drive Manhole to Pipe Boot**

- A power sleeve made from reinforced nylon polymer with SS threaded inserts embedded in the expansion mechanism expands with a certified installation wrench

**Corrugated Pipe Adaptor**

- Creates flat rubber sealing surface for corrugated pipe to manhole boot

**T-Handle & Wrench with preset torque inputs**

**CRETE STIK**

PREFORMED BUTYL JOINT SEALANT

- Cost effective
- Joint sealant that will not shrink, crack or dry out
- A variety of shapes and sizes to fit most applications
- Meets ASTM C 990 requirements for Compression Index per ASTM C 972
- Starter strip leads to less waste per roll
- Improved release liner



**EZ-STIK #3**

BUTYL SEALANT IN TROWELABLE FORM

- High-quality butyl rubber base
- Excellent gap and crack filling properties
- Resistance to acids and alkalis
- A permanent flexible solution





**Press-Seal**  
CORPORATION

**Multi-T Storm Water 4" & 6" lateral connections for HDPE**


- Seals at inner liner of corrugated pipe
- Alignment node rests in valley of corrugation
- One size fits 12" to 60" pipe main
- Visual stops for fully homed pipe

**Option 1 - Molded rubber sleeve, PVC hub, take up clamp, gasket for HDPE**

**Option 2 - Lateral connector rubber sleeve and take up clamp**



Mult-T only has one part to fit 12" to 60" pipe



HDPE pipe hub gasket

PVC hub  
Take up clamp

Rubber sleeve



**JAM Wrap**  
Joint and Manhole Tape



**Concrete Joint Wrap**  
**for I & I Prevention**

**Features**

- Simple to apply, no primer, no heat, just peel & press!
- 50 mil elastomeric mastic with 15 mil woven polypropylene, pressure sensitive application, 4", 6", 8", & 12" width by 150' roll or cut to manhole size

**Benefits**

- Fast, easy installation, I & I prevention, no primer or heat needed, accommodates ground movement

**Applications**

- Manhole joint/chimney sealing, rectangular, round, or square vaults, pipeline corrosion protection, and step-down joints





**WHITLAM**  
The Industry Standard for Over 100 Years

## Paints and Coatings



### Black Dragon Gilsonite Asphalt Paint

- Permanent waterproof & rustproof protection
- Applied with brush, roller or spray (after thinning)
- Fast dry and one coat
- Indefinite shelf life
- Fully bituminous coating
- Meets Federal Specification TTC-494 types I, II, and III
- Quart, gallon, 5 gallon, and 55 gallon drum
- Excellent for use on concrete, underground infrastructure, iron manhole casting, and wood



### BLACK SEAL Acrylic Concrete Sealer and Damp Proof Coating

- Quick drying formula – one coat coverage
- Excellent adhesion and durability
- Provides permanent waterproof protection
- Concrete, masonry, & brick
- Interior and exterior use for damp-coating
- 5 gallon and 55 gallon drums

*Easy clean up with warm water and soap!*





**QUICK-TRENCH™**  
Pre-Sloped Drainage System

## Trench Drain System

### Pre-sloped trench drain 6" and 12"

- MADE IN USA
- Easy to install modular components
- An innovative, new system designed to simplify linear drain installations under finished concrete, pavers, decking, or other hard surfaces
- Patented pre-sloped systems or neutral
- Various grate choices and designs; pedestrian traffic, ADA compliant, Heavy Duty H25, Class C
- **NEW 6" 45° and Tee connectors**



### Shallow trench drainage

- 39.4" polypropylene composite sections
- 2.8" wide by 2.8" deep
- Uniform exterior and 0.5% sloped or neutral
- Interior has full radius bottom
- Optional pour board maintains grate width during concrete pour



Click on \*  
For Product  
Web Links

# ADAPTOR



Website  
Link



## Valve Box Stabilizers

**Stabilizes - Centers over operating nut -  
Prevents shifting and settling of valve box**



### Valve Box Adaptor II

- Rubber body for precise fit
- 2" to 16" gate valves
- 5 1/4" CI valve box or 8" C-900



### PVC Adaptor

- Rubber body for precise fit
- 2" to 16" gate valves
- 6" SCH-40, 6" SDR-35, and C-900 pipe as valve box



### Multi-Fit Adaptor

- 3" to 24" valves
- Blue, Black or Purple
- 5 1/4" CI valve box
- 8" & 6" PVC pipe
- #4, #6 and #160 bases



### Butterfly Valve Adaptor

- .25" powder-coated steel frame
- 6" to 36" butterfly valves
- 6850 or 6855 valve box



### Curb Stop Adaptor

- One-of-a-kind custom molded
- Fits 3/4" to 2" curb stops
- Arched pattern base Tyler or B&T Bison, or equal



### Gate Valve Adaptor


- .25" powder-coated steel frame
- 3/4" rubber gasket
- 3" to 16" gate valves
- 6860, #4 or #6 valve box



## E3 Manhole Seal®

### External Joint Seal

- Easy external installation
- No special tools, primer, or heat needed
- Available in 8" and 14" Sleeve Lengths
  - Custom sizes available
  - Saves money

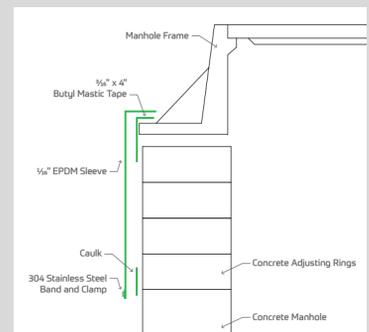



### Pipe Seals

- Designed to provide a gas and watertight seal
- EPDM suitable for most applications in water (nitrile available -40° F to 210° F)
- Glass reinforced plastic pressure plates with steel zinc dichromate or SS hardware
- JJS stock PS-200 to PS-600 in carbon steel and stainless steel

### Wall and Floor Sleeves

- Wall collars attached with continuous MIG weld for watertight seal
- Wall collars normally 2" wide, special widths available
- Painted steel, FB epoxy, Galvanized, or SS materials of construction

### Casing Spacers

- Accommodate mechanical joint pipe, push-on pipe, restrained pipe, welded joint pipe
- Shell 14-gauge 304SS mig welded 10-gauge risers
- Liner ribbed PVC extrusion .125" thick overlaps edges
- Runners 2" wide ultra high molecular polymer
- Fasteners are 5/16" SS bolts and hex nut



### Vent Pipes

- Made in A-36 Steel, 304 SS or 316 SS
- Screens in carbon steel or SS
- Coatings of primer, galvanizing (cold or hot dip), coal tar epoxy, or custom
- Fabricated to your design



Click on \*  
For Product  
Web Links

**VYLON® PIPE**



## **Vylon Pipe for new sanitary sewer pipe**

- Cost effective vs solid wall pipe without loss of performance
- Strong “I” beam closed profile design
- Vylon can meet the rigorous requirements of a pipe flattening test
- Chemically resistant to H<sub>2</sub>SO<sub>4</sub> corrosion
- The superior 4-fin gasket assures leak proof joints
- PS 46 & 75 sizes 21” to 54” meeting 75 PSI
- Superior joint design meet/exceed ASTM F477 standards
- Leak free four finned gasket



\*



## **\* Sewer main slip lining**

- Superior Hydraulics – the manning .009 “n” factor will often allow Vylon slipliner pipe to carry as much or more flow than the existing pipe being rehabilitated
- Easy to install and has a proven 30-year history
- Vylon slipliner pipe is designed for the repair and rehabilitation of existing sewers
- Low-cost alternative to dig and replace
- Allows the lining of a live sewer with a completely new pipe
- Eliminates the high costs of redundant bypass pumping systems
- Lower installed cost than cured in place lining
- Vylon’s flush coupling has an anti-disengaging feature to ensure coupled pipe stays connected
- Simple ‘click’ connection for positive connection





**Harrington**  
STORZ CONNECT

**NO HAZARDOUS LOCKS !  
FAST QUARTER TURN  
CONNECTION TIME !**

- Standardize your connections
- No adapters
- Connect LDH direct to hydrant
- Vandal resistant
- Maintenance free FDC

**HPHA Cap** - Uses the hydrants' existing brass with the adapter – only requires the removal of the hydrant's threaded cap

**HIHS Cap** - Requires removal of the brass from the hydrant - hydrant specific



**FREE reflective cables for new specified jobs!**

**MJ Gasket and T-Head Bolts**

**Gaskets**

- SBR or Nitrile

**T-Head Bolts**

- 3/4" x 3 1/2"
- 3/4" x 4"
- 3/4" x 4 1/2"
- Cor-Ten or Cor-Blue
- 304 SS with epoxy coated nut

**Bolt packs with MJ gasket kits or pails**



**T-Head Bolts**

- For use with MJ valve installation
- Low and medium carbon steel specifications including, but not limited to, ASTM A-325 specifications
- 304 and 316 Stainless Steel
- AIS Domestic and Import available

## Wing Nut Style Pipe Plug



### Made in the U.S.A.

- No metal parts to corrode (Except 15" & 18")
- **Rated for 5 PSI**
- Seals bell and spigot ends of all plastic, iron or clay pipe
- Rugged nylon and rubber construction

Size	Expansion Range
4"	3¾" to 4¾"
5"	4¾" to 5¾"
6"	5¾" to 6¾"
8"	7⅞" to 8⅞"
10"	9¾" to 11"
12"	11¾" to 13"
15"	14¾" to 15¼"
18"	17¾" to 18¼"



### "T" Cone Expandable Pipe Plugs

- Available in sizes 1" through 8"
- Utility sewer pipe plugs
- Cleanout or test plug for building drains and DWV piping
- Cast iron, steel, clay, and plastic pipe
- Easy to install and remove
- Economical and reusable
- No metal parts to rust
- Designed for non-pressure sewers





### Silent Check Valve

#### **MADE IN USA**

- Eliminates hammering
- Nested flappers for long life
- Gasketless housing design
- Flapper has convex shape and angled seat design
- Stainless steel worm gear clamps
- Special texture on housing for improved hose grip
- Injection molded ABS housing provides high durability
- Can be mounted vertically or horizontally
- Fits copper, PVC, or IPS pipe
- All valves are pressure tested



### Original Tu-Turn Brushes

It really only takes "tu" turns. Denser fill and tougher steel bristles. Bristles are tempered for longer life and scars deeper for stronger bond

- Machine brushes
- Economy brushes
- Plastic handle brushes
- Stainless steel brushes
- Stainless steel economy
- Dope, acid and chip brushes



## Pipe Outside Diameter Chart

Size	Copper	Steel IPS	Ductile	SDR 26/35	Clay	Concrete Estimated	AC100	AC150	AC200	N-12	Vylon (Any PS)	
											Pipe	Bell
¼	0.375	0.540										
½	0.625	0.840										
¾	0.875	1.050										
1	1.125	1.315										
1¼	1.375	1.660										
1½	1.625	1.900										
2	2.125	2.375										
2½	2.625	2.875										
3	3.125	3.500	3.96									
3½	3.625	4.000										
4	4.125	4.500	4.80	4.215	4.85-5.38	6.00	5.26	5.32	5.57	4.80		
5	5.125	5.563			6.31-6.65							
6	6.125	6.625	6.90	6.275	7.19-7.93	8.00	7.40	7.37	7.60	6.90		
8	8.125	8.625	9.05	8.40	9.25-10.09	10.25	9.57	9.62	9.79	9.10		
10		10.75	11.10	10.50	11.50-12.88	12.75	11.77	12.12	12.12	11.40		
12		12.75	13.20	12.50	13.75-15.30	16.00	14.04	14.38	14.38	14.50		
14		14.00	15.30				15.80	16.73	16.88			
15				15.30	17.19-18.70	19.50				18.00		
16		16.00	17.40				17.94	18.97	19.19			
18		18.00	19.50	18.70	20.65-22.40	23.00	20.44	21.20	22.54	22.00		
20		20.00	21.60				22.50	23.54	25.02			
21				22.05	24.13-26.43	26.50					22.29	24.79
24		24.00	25.80	24.80	27.50-29.84	30.00	27.17	28.22	29.98	28.00	25.24	27.95
27					31.00-32.13	35.00					28.46	31.39
30		30.00	32.00	32.00	34.38-35.63	38.50	33.80	35.42	37.48	36.00	31.69	34.84
36		36.00	38.30	38.30		45.50				42.00	38.13	41.72
42		42.00	44.50	44.50		52.50				48.00	44.58	48.62
48		48.00	50.80	50.80		59.50				54.00	51.02	55.50
54		54.00	57.56			66.50					57.47	62.08
60		60.00	61.61			73.50				67.00		
64			65.67									

**For more information, please visit our website  
[www.JimJollySales.com](http://www.JimJollySales.com) or call 847.669.7570**